

# 6611/R



# FERMOD®

INNOVATION since 1934

## Modular shelving system with removable shelf inserts

No.1 in  
EUROPE



Restaurants

Schools

Hospitality

Universities

Hospitals

C-Stores

Catering

Care Facilities

Laundries

Cold Rooms

Laboratories

Clean Rooms



MADE IN FRANCE

### Storage system for clean environment



Quick assembly



Easy to clean



Lifetime warranty against rust and corrosion



Maximum weight  
capacity of 800 lbs / shelf  
> Further details inside

# Universal System




Vented or solid Polymer shelf inserts

Tool-free Assembly

Angle section

Leveling via adjustable composite feet

+ Staggered shelving possible

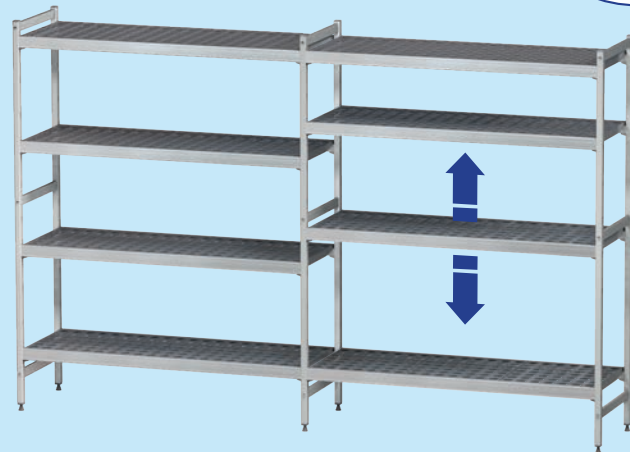

FERMOD leads the market in product layout and design, storage optimization, and hygiene awareness.

Offers completely flexible solutions for your storage needs.

With an operating temperature range of - 40°F to 140°F (- 40°C to 60°C), Fermod is the perfect solution for coldroom applications.

Extremely safe and reliable ; manufactured from high-strength aluminium, anodized to 20 microns.

Fermod eliminates any need for cross-bracing and offers full access through its uniquely designed internal angle configuration system.

Shelf adjustment is quick and simple with preset positions 6 inches (150 mm) apart, allowing for individual adaptation to suit storage requirements.

Removable shelf inserts are manufactured of heavy-duty polymer and are dishwasher safe.



# Estimation & Design



Please find our room layout software for the Fermod shelving system online: [www.fermostock.com](http://www.fermostock.com)



Fermod offers outstanding solutions in space management; ensuring maximum use of available storage area through different combinations of its standard units.

Fermod offers efficient and cost-effective storage even within obstructed areas.


In addition to our in-house design service, we offer the ability of self-design through our Fermod layout software.

Our commercial department is available to assist you with selection and layout services for all your projects.

# Choice & Solutions

## Static modular shelving system

Assembly is with conical metal clamps, manufactured of anodized aluminium, ensuring extremely stable units. Fermod can be installed in singular units or combinations allowing a number of configurations including « L », « U », « T », and « + », layouts.

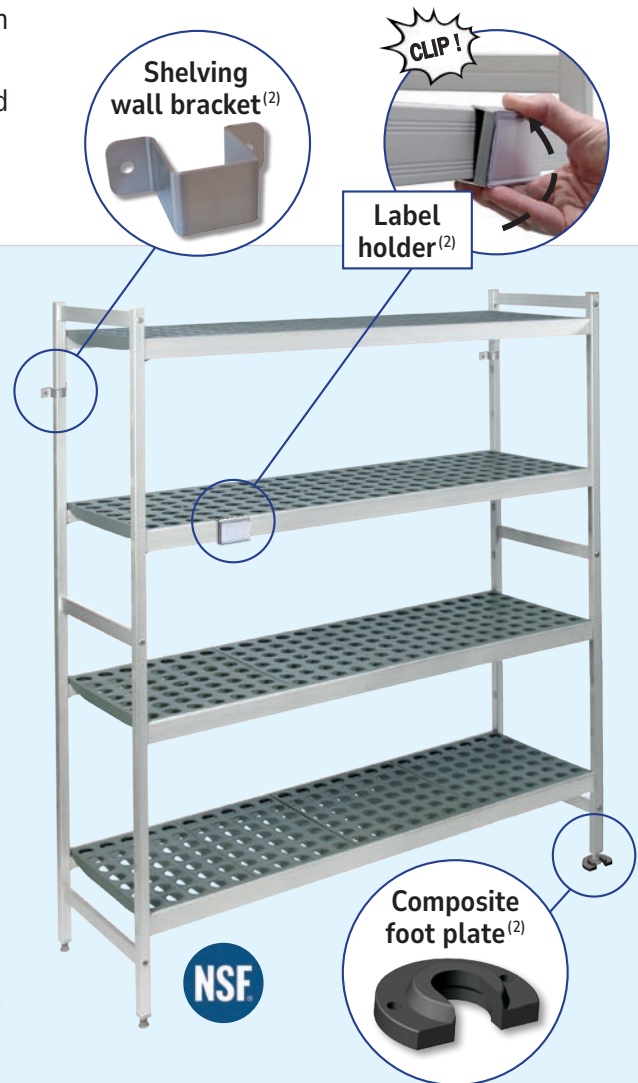

Available standard sizes:

> **10 lengths:**

26, 31, 35, 38, 42, 47, 52, 59, 64, 68 in.<sup>(1)</sup>  
(657, 777, 897, 957, 1077, 1197, 1317, 1497, 1617, 1737 mm)


> **5 heights of uprights:**

24, 57, 66, 71, 83 in.<sup>(1)</sup>  
(600, 1465, 1685, 1800, 2135 mm)

> **2 versions of removable shelf inserts:**

**6611/R:** vented polymer shelf inserts  
**3 depths:** 14, 18, 22 in.<sup>(1)</sup> (360, 460, 560 mm)

**6622/R:** solid polymer shelf inserts  
**2 depths:** 18, 22 in.<sup>(1)</sup> (460, 560 mm)



<sup>(1)</sup> All dimensions in inches have been rounded

<sup>(2)</sup> Option

	Depths		
in. <sup>(1)</sup>	14	18	22
mm	360	460	560

	Heights				
	24	57	66	71	83
	600	1465	1685	1800	2135

### Loading per Shelf level (for evenly distributed load)

Shelf length (in. <sup>(1)</sup> )	26	31	35	38	42	47	52	59	64	68
mm	657	777	897	957	1077	1197	1317	1497	1617	1737
Fermod 6611/R & 6622/R (lbs)	800	800	800	800	800	800	600	600	600	600

Maximum weight is 2000 lbs between 2 uprights / 1300 lbs between 2 uprights with angle configuration



## Mobile units

Mobile units are designed to be moved with a minimum of effort and to allow for full access when cleaning.

The casters are rustproof and made of high-quality polymer and stainless steel allowing for smooth operation.

Mobile units offer extra flexibility and increased storage capacity.

> Construct with 3,4,5 levels or greater depending on requirements.



	Depths			Heights <sup>(2)</sup>	
in. <sup>(1)</sup>	14	18	22	64 <sup>(3)</sup>	76
mm	360	460	560	1636 <sup>(3)</sup>	1936

<sup>(2)</sup> The height includes the caster

<sup>(3)</sup> Only available in 22 in. depth

### Loading per Shelf level (for evenly distributed load)


Shelf length (in. <sup>(1)</sup> )	26	31	35	38	42	47	52	59	64	68
mm	657	777	897	957	1077	1197	1317	1497	1617	1737
Fermod 6611/R & 6622/R (lbs)	250	250	250	250	250	250	250	250	250	250

Please note maximum weight of 500 lbs between 2 uprights - <sup>(1)</sup> All dimensions in inches have been rounded

## Dunnage racks

Manufactured with a standard height of 12 inches (300 mm), dunnage racks provide yet another range of applications.

They can complete shelving systems within cold rooms, be placed under tables, be used for items suitable for only low-level storage, and for machines and other individual applications.

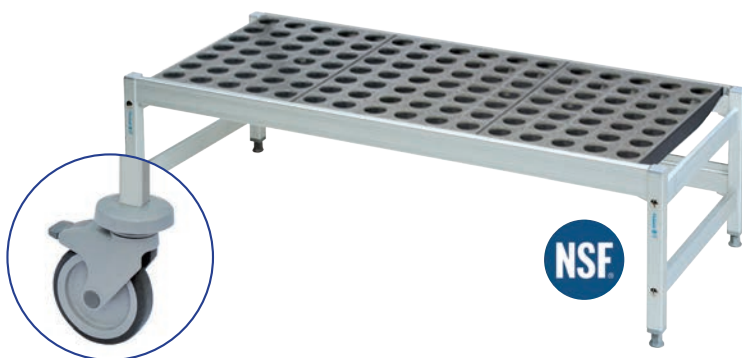

> Mobile dunnage rack is also available.

<sup>(1)</sup> All dimensions in inches have been rounded

## Milk transport cart



	Height	Depths		
in. <sup>(1)</sup>	12	14	18	22
mm	300	360	460	560

### Loading per Shelf level (for evenly distributed load)

Shelf length (in. <sup>(1)</sup> )	26	31	35	38	42	47	52	59
mm	657	777	897	957	1077	1197	1317	1497
Fermod 6611/R & 6622/R (lbs)	800	800	800	800	800	800	600	600

## Beer handling keg racks

Fermod's Beer Keg Racks are made to handle kegs, half and quarter barrels, as well as cases. These beer handling racks provide a neat and orderly solution for the storage of beer inside coolers. The keg racks are constructed of heavy-duty but lightweight anodized aluminum. Construction is designed to withstand heavy kegs and the repeat impact of being loaded and unloaded.

> Construct with 2 or 3 levels depending on requirements.

Shelving wall bracket  
(Option)



NSF

Composite foot plate  
(Option)



	Depth	Heights	
in. <sup>(1)</sup>	18	57	71
mm	460	1465	1800

### Loading per Shelf level (for evenly distributed load)

Shelf length (in. <sup>(1)</sup> )	35	38	42	52	59
mm	897	957	1077	1317	1497
Fermod 6611/R & 6622/R (lbs)	800	800	800	600	600

<sup>(1)</sup> All dimensions in inches have been rounded

Maximum weight is 2000 lbs between 2 uprights

## Wall shelving

One level wall shelving  
Can be attached on wall or wall panel  
Maximum weight capacity: **165 lbs**  
(depending on the acceptable support load and the wall backing quality)

Available standard sizes:

> **8 lengths:**

26, 31, 35, 38, 42, 47, 52, 59 in.<sup>(1)</sup>  
(657, 777, 897, 957, 1077, 1197, 1317, 1497 mm)

> **2 depths:**

14<sup>(2)</sup>, 18 in.<sup>(1)</sup> (360<sup>(2)</sup>, 460 mm)

<sup>(1)</sup> All dimensions in inches have been rounded

<sup>(2)</sup> Only available with shelf inserts ref. 6611/R

Side edge

6622/R

Two versions of removable shelf inserts:  
**Ref. 6611/R:** vented polymer shelf inserts  
**Ref. 6622/R:** solid polymer shelf inserts



NSF

# Mounting & Installation

All Fermod components are packaged and shrink-wrapped ensuring full protection during delivery and storage.


Assembly with the use of conical metal support clamps (patented) allows one person to carry out the installation quickly and efficiently without the need of tools.

Quick assembly and mounting:

- Choose shelf levels from the 10, 11 or 13 preset positions on the upright (depending on height),
- Insert the metal support clamp at the desired height,
- Position the horizontal shelf rails onto the metal clamps,
- Place the shelf inserts onto the horizontal rails,
- Adjust the composite feet to ensure stabilization.

Where angle-mounting, the use of the Fermod angle section is recommended which eliminates internal corner posts and improves access.

# Food hygiene certifications & Compatibility

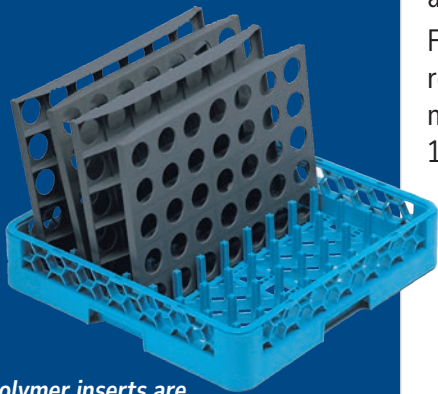

Polymer inserts are dishwasher safe (+ 212°F / +100°C)

The benefits of Fermod modular shelving systems

## Installers & technical engineering offices

FERMOD has been manufacturing, developing and selling modular shelving systems for over thirty years.

FERMOD is accepted and designed for the food industry and recommended by engineers because of its quality, benefits, and easy installation.

The quality of our product is backed by a **LIFETIME WARRANTY AGAINST RUST AND CORROSION.**

Our commercial and technical departments are always ready to assist and aid you with your shelving needs.

The product is dispatched to individual customers' requirements ensuring correct marking and wrapping to the final destination.

From their conception, our products are developed to help protect our environment. This result is achieved by producing durable items, using only the amount of raw material necessary and selecting recyclable material whenever possible. Our product is green and 100% recyclable to ensure environmental friendliness.

## For end-users

All Fermod surfaces are smooth, allowing for easy cleaning, and designed to withstand intensive and frequent cleaning activity to aid in the reduction of bacterial contamination. Fermod modular shelving system is compatible with HACCP cleaning programs.

## Certifying organizations

NSF International - NF food hygiene standard




# Services



Room layouts and quotations, per specification, usually within 24 hours



Ships within 48 hours\*  
\*Departure from our Chicago warehouse



Mounting plans included



Literature, certificates and images downloadable on the internet



Online layout and calculation software



BIM and CAD libraries, DXF and DWG files



**FERMOD**<sup>®</sup>  
INNOVATION since 1934

5 Revere Drive - Suite 200 - Northbrook, IL 60062  
Office: 847-231-0367 - Toll free: 888-484-0367  
Fax: 847-231-0366  
Email: [uscontact@fermod.com](mailto:uscontact@fermod.com)