



**BU
ILT
TO
EN
DU
RE**

EFFECTIVE: Jan 1, 2024

TABLE OF CONTENTS

ICE MACHINES

ICE MACHINE MODEL CODE & USAGE GUIDE	5
TYPES OF ICE	8
CUBER SERIES	10
Undercounter Cubers with Built-In Bins	12
KMEdgeX™ Crescent Cubers	14
KMEdge™ Crescent Cubers	16
KMEdge™ Crescent Cubers for Dispensers	20
KMEdge™ Low Profile Crescent Cubers	22
KMEdge™ Crescent Cubers - Serenity Series	23
IM Square Cubers {Specialty Ice}	24
FLAKER / CUBELET SERIES	26
Undercounter Flakers with Built-In Bins	27
Flakers	28
Undercounter Cubelet with Built-In Bins	30
Cubelet Ice Machines	32
Cubelets - Serenity Series	33
DISPENSER SERIES	34
DCM Ice & Water Dispensers	38
DB/DKM Hotel/Motel Dispensers	40
DM/DWM Dispensers	41
ICE STORAGE BINS	42
DISPENSER STANDS	44
TOP KIT MATRIX	45
REMOTE CONDENSERS & MATRIX	46
WATER FILTRATION	48
OZONE DEVICE & REMOTE MONITORING	49
ICE ACCESSORIES	98

Navigate to specific pages by clicking on the page numbers.

REFRIGERATION

STEELHEART® FEATURES & BENEFITS	52
REFRIGERATION MODEL CODE	53
STEELHEART® SERIES	54
Upright Refrigerators & Freezers	54
Dual Temps	57
Pass-Thrus	58
Roll-Ins	60
Roll-Thrus	61
Heated Cabinets	62
Compact Undercounter Refrigerator	64
Undercounter Refrigerators & Freezers	65
Undercounter Refrigerators & Freezers with Drawers	68
Worktop Refrigerators & Freezers	70
Worktop Refrigerators & Freezers with Drawers	72
Drawer / Door Combination Refrigerators	74
Prep Tables - Sandwich Top Refrigerators	75
Prep Tables - Sandwich Top Refrigerators with Drawers	76
Prep Tables - Mega Top Refrigerators	78
Prep Tables - Mega Top Refrigerators with Drawers	80
Prep Tables - Pizza Refrigerators	82
Prep Tables - Pizza Refrigerators with Drawers	83
Prep Tables - Pizza Refrigerators Drawer / Door Combos	84
Refrigerated Equipment Stands	85
GLASS DOOR MERCHANDISERS	86
BACK BAR REFRIGERATION	88
SUSHI CASES	93
ECONOMY SERIES	94
REFRIGERATION ACCESSORIES	100





HOSHIZAKI



Hoshizaki story

HOSHIZAKI AMERICA, INC., with corporate headquarters in Peachtree City, Georgia, and a second manufacturing facility in Griffin, Georgia, operates some of the most automated production facilities in the industry. Certified as Georgia Made, HOSHIZAKI is proud to inform domestic and international consumers that many of their products have received the certification confirming they are manufactured in the state of Georgia. Using state-of-the-art technology, every HOSHIZAKI unit is run-tested at each factory, and undergoes rigorous quality performance tests. HOSHIZAKI offers advanced training seminars at our headquarters and basic training programs across the country for both service representatives and customers.





Griffin

HOSHIZAKI. BEYOND STRONG.

It's the promise of reliability... and the peace of mind that comes with it.
It's performing beyond expectations...with relentless durability and sustainability.
It's knowing that we've already thought about your future and can endure at the next level.

DID YOU KNOW?

- **HOSHIZAKI** is the world's largest manufacturer of commercial ice equipment, employing over 13,180 people.
- **HOSHIZAKI** is the world's largest manufacturer of commercial refrigerated food service equipment with sales of over \$2.5 billion serving customers in 60 nations.
- **HOSHIZAKI** operates plants worldwide including two in the USA, three in Japan, one each in England and China.
- In expansion to a full-service kitchen equipment company, **HOSHIZAKI** acquired Lancer Corporation in 2006, GRAM Commercial A/S in 2008, and both Jackson and Macom in 2013.
- **HOSHIZAKI** is certified in ISO-9001 and ISO-14001 - being the first and only food service equipment manufacturer to achieve ISO-14001.
- **HOSHIZAKI** was awarded "Partner Of The Year - Sustained Excellence" by ENERGY STAR®.





WARRANTY

EFFECTIVE: January 1, 2024

Supersedes all previous price lists

TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. HOSHIZAKI reserves the right to determine point of shipment.

TERMS: Terms are such as the company may extend to the purchaser.

LOST OR DAMAGED SHIPMENTS: Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment and the common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore, it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

WARRANTY

All units to be free from manufacturing defects, covered by:

KMEdge™ Series Cubers, DKM Ice Machine & Dispenser and DB/DM Hotel/Motel Dispensers

3-Year - Parts & Labor on entire machine & DB/DM Dispenser

5-Year - Parts & Labor on Evaporator, Parts on Compressor, Air-Cooled Condenser Coil

AM-50 Series Cubers & C-80 Flakers

2-Year - Parts & Labor on Entire Machine

DWM MODwater® Water Dispensers

3-Year - Parts & Labor on Entire Machine

IM Series Cubers (Specialty Ice)

3-Year - Parts & Labor on Entire Machine

5-Year - Parts on Compressor and Air-Cooled Condenser Coil

Flakers and Cubelet Ice Machines, DCM Ice & Water Dispensers

3-Year - Parts & Labor on Entire Machine

5-Year - Parts on Compressor and Air-Cooled Condenser Coil

Bins & Water Dispensers

3-Year - Parts & Labor on Slope Front Bins

5-Year - Parts & Labor on Large Upright Bin Models

Countertop Refrigerated Display Cases

1-Year - Parts & Labor on Entire Machine

2-Year - Parts & Labor on Compressor, Evaporator, Air-Cooled Condenser

5-Year - Parts on Compressor, Air-Cooled Condenser

Accessories

90 Day - Parts only


1-Year - HS-5061 Drain Pump (Beckett Brand) - Parts & Labor

1-Year - Water Filter System & Replaceable Elements


Warranty

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact factory for warranty in other countries. Refer to manufacturer's full warranty for complete details. Suggested list prices are intended only as a guide. This does not restrict the price seller may establish due to market conditions.

AGENCY LISTINGS and MARKS



ICE MACHINE MODEL NUMBER IDENTIFICATION CODE

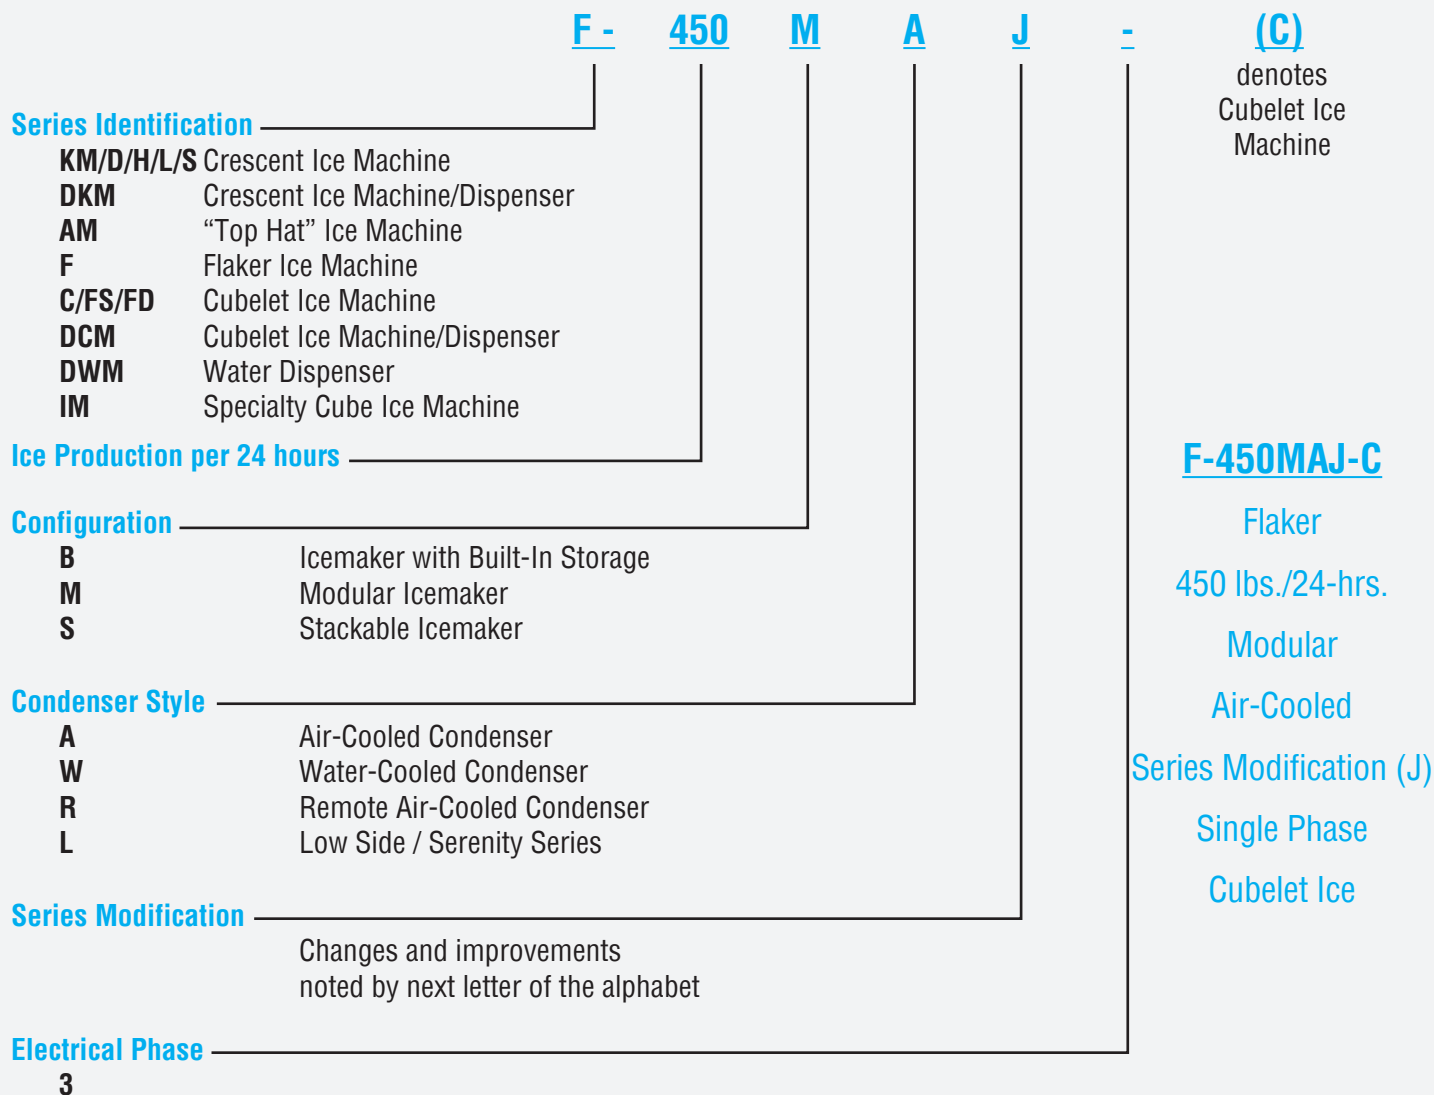

CHOOSING THE RIGHT ICE MAKER



HOW MUCH ICE DO YOU NEED?

Before choosing an ice maker, take a look at how many customers you serve and what type of ice you will need



Restaurants use an average of **2 lbs.** of ice per customer per day

Schools and university cafeterias average about **1.5 lbs.** of ice per student per day



Hospital cafeterias use about **1 lbs.** of ice per person per day and an average of **10 lbs.** for every bed

Bars and cocktail lounges use about **3 lbs.** of ice per seat



Hotels use about **5 lbs.** of ice per room per day

Pounds of ice used
X **Number of customers served**

= **The size of ice maker you need**

Your menu should dictate your machine –not the other way around

Ice

Hoshizaki Ice Machines maximize efficiency without compromising the quality. We offer clear, hard, and clean ice from machines guaranteed to last for years. Choose between **8 different types** of ice from air-cooled, water-cooled and remote air-cooled models. Versatile for any operation, our ice machines are perfect for restaurants and bars, convenience stores, hospitality industries, supermarkets, schools and universities, healthcare centers and more.



Click on logo for more information.



8 Types of Ice

with a variety of production & storage options

Hover over ice images to see the dimensions.

KMEdge™

Individual, hard, clear crescent shape





Cubelet




Chewable, small pellet shape





Soft Cubelet

SOFT - Chewable, small pellet shape

Flaked

Soft, light, chewable moldable ice







 Restaurants


 University/School

 Hotels

 Business

 Bars & Cocktail Lounges

 Healthcare

 C-Store

 Grocery

options

Specialty Ice


Top Hat

Individual, hard, clear round shape



1by1 Cube

Individual, hard, clear square shape



Sphere

Individual 1.8" in diameter, clear and solid




2by2 Cube

Individual, hard, clear square shape



CUBER



CLEAN, CLEAR, CRESCENT CUBES

Clean, clear, individual crescent cubes. Longer lasting equipment and the most efficient, money-saving ice maker ever.



Energy Efficient

- Our CycleSaver design produces the same amount of ice in half the number of cycles
- Resulting in a longer total product life

Sanitary Components

- Removable air filters allow for easy and affordable maintenance
- Sealed compartments protect the evaporator, reducing bacteria growth and cleaning frequency

Dual-sided Evaporator

- Makes ice on both sides of the evaporator
- Reduces energy costs by creating the most efficient heat exchange



Hoshizaki's patented stainless steel evaporator design rinses out impurities, freezing the cleanest water resulting in individual, crystal clear, clean KMEdge™ ice.

CLICK  TO PLAY VIDEO



Undercounter **CUBER**



-DS shown with Custom Cabinetry

AM Cubers with Built-In Bins



AM-50BAJ

14 7/8" W X 22 5/8" D X 33 1/2" H
The ADA compliant machine dimensions are 147/8" W x 225/8" D x 311/2" H

Model	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
AM-50BAJ	115V/60/1	35	51	17	112 Lbs.	\$5,660
AM-50BAJ-DS	115V/60/1	35	51	17	112 Lbs.	\$5,740
AM-50BAJ-AD	115V/60/1	34	55	16.8	112 Lbs.	\$5,840
AM-50BAJ-ADDS	115V/60/1	34	55	16.8	112 Lbs.	\$6,020



Filter

Accessories

Self-Contained Bin Storage Capacity Up to 22 Lbs.



Undercounter KM Cubers with Built-In Bins



KM-81BAJ★

17 3/4" W X 24" D X 39" H (6" Legs Included)



Filter

Accessories

Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	52	78	8.5	125 Lbs.	\$5,060

Self-Contained Bin Storage Capacity Up to 38 Lbs.



KM-116BAJ★

23 3/4" W X 24" D X 39" H (6" Legs Included)



Filter

Accessories

Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	100	125	8.1	146 Lbs.	\$5,710

Self-Contained Bin Storage Capacity Up to 53 Lbs.

★ Energy Star
†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



Undercounter CUBER



Undercounter KM Cubers with Built-In Bins

KM-161B_J

23 3/4"W X 28"D X 39"H

Model	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-161BAJ	115V/60/1	123	163	8.6	161 Lbs.	\$6,260
KM-161BWJ	115V/60/1	135	153	6.5	161 Lbs.	\$6,600



Filter

Self-Contained Bin Storage Capacity Up to 78 Lbs.

Accessories

KM-231BAJ

24"W X 28"D X 39"H



Filter

Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	147	213	8.4	165 Lbs.	\$6,780

Self-Contained Bin Storage Capacity Up to 80 Lbs.

Accessories



KM-301B_J

30"W X 28"D X 39"H



Filter

Self-Contained Bin Storage Capacity Up to 100 Lbs.

Model	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-301BAJ	115V/60/1	212	290	7.1	206 Lbs.	\$7,920
KM-301BWJ	115V/60/1	237	285	4.9	189 Lbs.	\$7,990

Accessories



Intertek



KM|EDGE X

ICE MACHINE SERIES

Features & Benefits




Reliable operation with stronger, more durable construction, less service parts, and increased ice production.



Easier installation with a more compact footprint and factory installed ultrasonic bin control.



Simple maintenance with new CleanAssist technology and redesigned float switch for one-hour cleaning.

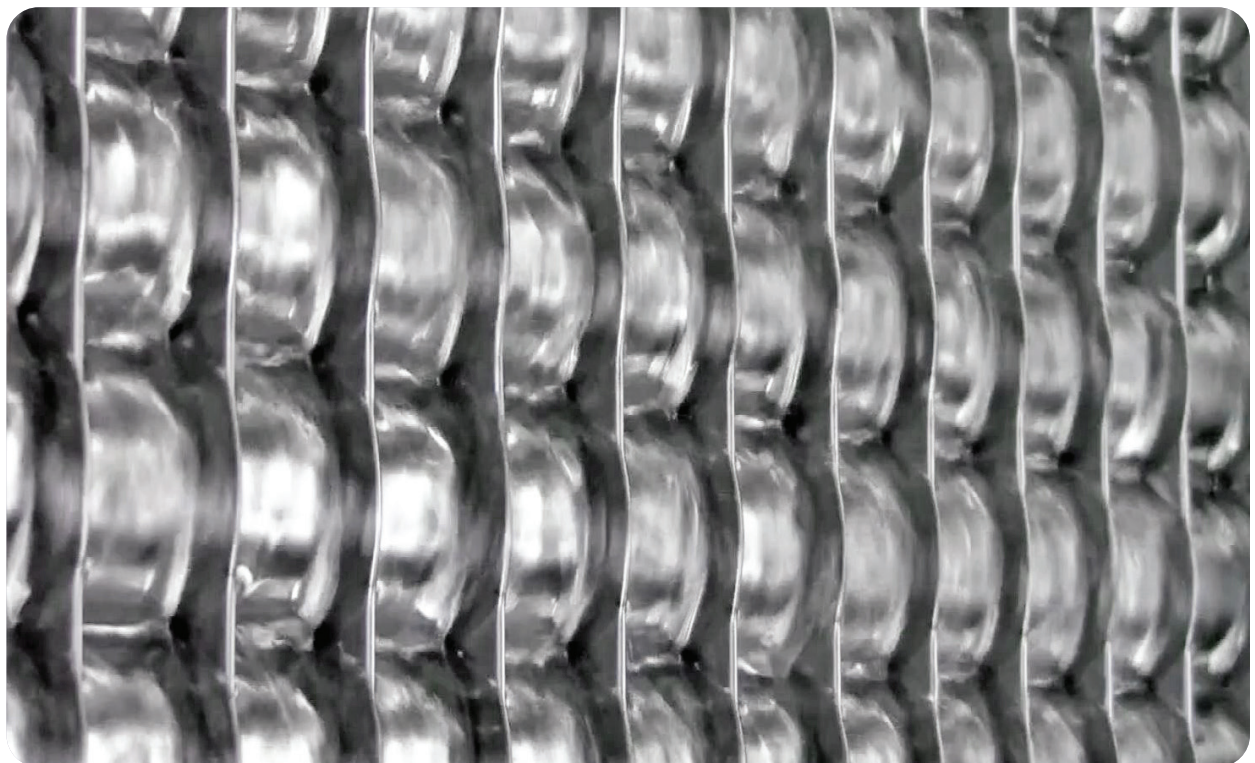

Modular CUBERS



KM-350M_J

22"W X 27 3/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-350MAJ*	115V/60/1	393	489	5.4	175 Lbs.	\$8,040
KM-350MWJ	115V/60/1	383	414	4.9	175 Lbs.	\$8,170



Filter

Accessories

Use URC-5FZ Condenser for Remote Air-Cooled Unit



KM-520M_J(Z)

22"W X 27 3/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-520MAJ*	115V/60/1	480	556	4.7	175 Lbs.	\$8,560
KM-520MWJ	115V/60/1	444	474	4.7	175 Lbs.	\$8,770
KM-520MRJZ*	115V/60/1	495	547	4.8	175 Lbs.	\$8,390



Filter

Accessories

Remote Condenser
MATRIX

Use URC-5FZ Condenser for Remote Air-Cooled Unit

KM-660M_J(Z)

22"W X 27 3/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-660MAJ	115V/60/1	560	650	5.3	180 Lbs.	\$9,720
KM-660MWJ	115V/60/1	630	647	4.3	180 Lbs.	\$10,030
KM-660MRJZ*	115V/60/1	579	642	5.3	180 Lbs..	\$9,590



Filter

Accessories

Remote Condenser
MATRIX

Use URC-5FZ Condenser for Remote Air-Cooled Unit



Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.

Bin graphic applies to all models on this page





Modular CUBERS

KM-901M_J(Z)(3)

30"W X 27 3/8"D X 32 1/2"H



Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-901MAJ	208-230V/60/1	753	905	5.0	260	\$13,280
KM-901MWJ	208-230V/60/1	870	950	3.6	250	\$13,580
KM-901MRJZ*	208-230V/60/1	780	900	4.8	255	\$12,910
KM-901MRJZ3*	208-230V/60/3	830	927	4.0	250	\$13,490



Filter

Accessories

Remote Condenser
MATRIX

Use U-14FZ Condenser for Remote Air-Cooled Unit
See **Top Kit Matrix** on page 45 for additional bin options.

KM-1100M_J(Z)

30"W X 27 3/8"D X 32 1/2"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1100MAJ	208-230V/60/1	935	1087	4.9	290 Lbs.	\$15,080
KM-1100MWJ	208-230V/60/1	1006	1073	4.0	280 Lbs.	\$14,950
KM-1100MRJZ	208-230V/60/1	1030	1156	4.5	272 Lbs.	\$14,530



Filter


Accessories

Remote Condenser
MATRIX

Use URC-14FZ Condenser for Remote Air-Cooled Unit




30 x 32 1/2 x 78 1/2



44 x 32 1/2 x 78 1/2



48 x 32 1/2 x 78 1/2



52 x 32 1/2 x 78 1/2

Dimensions shown in W x D x H include Bins. See **TOP KIT MATRIX** (pg 45) for top kit options based on bin size.

See **Top Kit Matrix** on page 45 for additional bin options.



Modular CUBERS



KM-1301S_J(Z)(3)

48"W X 27 3/8"D X 27 3/8"H



Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1301SAJ	208-230V/60/1	1301	1365	4.3	338 Lbs.	\$16,630
KM-1301SWJ	208-230V/60/1	1230	1247	3.8	335 Lbs.	\$16,760
KM-1301SRJZ	208-230V/60/1	1260	1400	4.3	335 Lbs.	\$16,480
KM-1301SAJ3*	208-230V/60/3	1350	1427	4.3	335 Lbs.	\$16,760
KM-1301SWJ3	208-230V/60/3	1355	1360	3.9	338 Lbs.	\$17,220
KM-1301SRJZ3*	208-230V/60/3	1330	1433	3.8	335 Lbs.	\$16,610

Model	Electrical	Kgs. of Ice per 24 hours 32°A / 21°C 21°A / 10°C		kWh per 45 kgs.	Shipping Weight	List F.O.B. Griffin
KM-1301SAJ-E	220-240V/50/1	501	624	4.5	154 Kgs.	\$17,520




Filter

Use URC-14FZ Condenser for Remote Air-Cooled Unit

Accessories

Remote Condenser
MATRIX

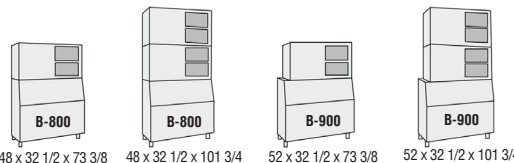

48 x 32 1/2 x 73 3/8 48 x 32 1/2 x 101 3/4 52 x 32 1/2 x 73 3/8 52 x 32 1/2 x 101 3/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.



KM-1340M_J(Z)(3)

30"W X 27 3/8"D X 41 1/2" H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1340MAJ*	208-230V/60/1	1089	1275	4.8	315 Lbs.	\$16,600
KM-1340MWJ	208-230V/60/1	1280	1323	3.6	315 Lbs.	\$16,740
KM-1340MRJZ	208-230V/60/1	1177	1371	4.5	289 Lbs.	\$16,420
KM-1340MRJZ3*	208-230V/60/3	1266	1428	4.1	289 Lbs.	\$16,740




Filter

Use URC-14FZ Condenser for Remote Air-Cooled Unit

Accessories

Remote Condenser
MATRIX



30 x 32 1/2 x 87 1/2 44 x 32 1/2 x 87 1/2 48 x 32 1/2 x 87 1/2 52 x 32 1/2 x 87 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.





Modular/Stackable CUBERS



KM-1601MRJZ(3)

30"W X 27 3/8"D X 41 5/8"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1601MRJZ	208-230V/60/1	1550	1594	4.4 316 Lbs.	\$19,120
KM-1601MRJZ3	208-230V/60/3	1550	1653	4.1 316 Lbs.	\$19,510



Accessories

Remote Condenser
MATRIX

Use URC-22FZ Condenser for Remote Air-Cooled Unit




30 x 32 1/2 x 87 1/2



44 x 32 1/2 x 87 1/2



48 x 32 1/2 x 87 1/2



52 x 32 1/2 x 87 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.

KM-1601S_J(Z)(3)

48"W X 27 3/8"D X 27 3/8"H



Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1601SAJ	208-230V/60/1	1433	1513	4.2 345 Lbs.	\$19,320
KM-1601SWJ	208-230V/60/1	1650	1660	3.3 335 Lbs.	\$19,370
KM-1601SRJZ*	208-230V/60/1	1600	1640	4.0 315 Lbs.	\$18,810
KM-1601SAJ3	208-230V/60/3	1414	1513	4.4 350 Lbs.	\$19,830
KM-1601SWJ3	208-230V/60/3	1660	1671	3.3 345 Lbs.	\$19,500
KM-1601SRJZ3	208-230V/60/3	1600	1635	4.1 355 Lbs.	\$19,230



Accessories

Remote Condenser
MATRIX


Use URC-22FZ Condenser for Remote Air-Cooled Unit



48 x 32 1/2 x 73 3/8



48 x 32 1/2 x 101 3/4



52 x 32 1/2 x 73 3/8



52 x 32 1/2 x 101 3/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.



Stackable CUBERS



KM-1900S_J(Z)(3)

48"W X 27 3/8"D X 36 7/16"H

Model	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F. O. B. Griffin
KM-1900SAJ*	208-230V/60/1	1675	1875	3.9	415 Lbs.	\$20,930
KM-1900SWJ	208-230V/60/1	1875	1880	3.2	415 Lbs.	\$21,050
KM-1900SRJZ*	208-230V/60/1	1700	1933	3.9	415 Lbs.	\$20,790
KM-1900SAJ3*	208-230V/60/3	1675	1865	3.9	415 Lbs.	\$21,050
KM-1900SWJ3	208-230V/60/3	1875	1880	3.2	415 Lbs.	\$21,620
KM-1900SRJZ3*	208-230V/60/3	1700	1933	3.9	415 Lbs.	\$20,930




Filter

Accessories

Remote Condenser
MATRIX

Use URC-22FZ Condenser for Remote Air-Cooled Unit



48 x 32 1/2 x 82 7/16 48 x 32 1/2 x 119 7/8 52 x 32 1/2 x 82 7/16 52 x 32 1/2 x 119 7/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.



KM-2200S_J(Z)(3)

48"W X 27 3/8"D X 36 7/16"H

Model	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F. O. B. Griffin
KM-2200SWJ3	208-230V/60/3	2200	2221	3.1	400 Lbs.	\$25,680
KM-2200SRJZ3*	208-230V/60/3	2075	2206	3.8	400 Lbs.	\$25,680




Filter

Accessories

Remote Condenser
MATRIX

Use URC-22FZ Condenser for Remote Air-Cooled Unit



48 x 32 1/2 x 82 7/16 48 x 32 1/2 x 119 7/8 52 x 32 1/2 x 82 7/16 52 x 32 1/2 x 119 7/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.





Modular/Stackable CUBERS



KM-2600S_JZ(3)

48"W X 27 3/8"D X 36 7/16"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-2600SWJ3	208-230V/60/3	2480	2482	3.6	440 Lbs.	\$29,160
KM-2600SRJZ3*	208-230V/60/3	2580	2617	3.6	440 Lbs.	\$27,930




Filter


Accessories

Remote Condenser
MATRIX

Use URC-26JZ Condenser for Remote Air-Cooled Unit



48 x 32 1/2 x 73 3/8



52 x 32 1/2 x 87 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.



KMH-2100S_J(Z)(3)

36"W X 40"D X 36 7/16"H

Model	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMH-2100SWJ3	208-230V/60/3	2000	2060	2.9	415 Lbs.	\$24,830
KMH-2100SRJZ*	208-230V/60/1	1850	2034	3.8	415 Lbs.	\$24,500
KMH-2100SRJZ3*	208-230V/60/3	1925	2026	3.7	415 Lbs.	\$24,640



Filter

Accessories

Remote Condenser
MATRIX

Use URC-22FZ Condenser for Remote Air-Cooled Unit

See Top Kit Matrix on page 45 for additional bin options.



KMD-410M_J

22"W X 24"D X 24"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMD-410MAJ	115V/60/1	351	418	5.7	161 Lbs.	\$7,860
KMD-410MWJ	115V/60/1	436	449	4.1	163 Lbs.	\$8,170




Filter

Accessories



22 x 30 1/2 x 35 3/8



22 x 32 1/2 x 70 1/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.



Dispenser CUBERS



KMD-460M_J

30"W X 24 1/4"D X 22 1/8"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMD-460MAJ	115V/60/1	400	440	5.5	170 Lbs.	\$8,530
KMD-460MWJ	115V/60/1	472	487	4.1	170 Lbs.	\$8,670



Accessories



Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.



KMD-530M_J(Z)

30"W X 24 1/4"D X 22 1/8"H

Model	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMD-530MAJ	115V/60/1	442	501	5.7	170 Lbs.	\$9,290
KMD-530MWJ	115V/60/1	500	515	4.7	170 Lbs.	\$9,420
KMD-530MRJZ	115V/60/1	440	498	6.1	170 Lbs.	\$9,130



Accessories

Remote Condenser
MATRIX

Use URC-5FZ Condenser for Remote Air-Cooled Unit



Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.



KMD-860M_J(Z)

30"W X 24 5/8"D X 28"H



Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMD-860MAJ	208-230V/60/1	665	855	5.2	248 Lbs.	\$13,070
KMD-860MWJ	208-230V/60/1	862	940	3.9	258 Lbs.	\$13,300
KMD-860MRJZ	208-230V/60/1	850	967	5.1	256 Lbs.	\$12,940



Accessories

Remote Condenser
MATRIX

Use URC-9FZ Condenser for Remote Air-Cooled Unit



30 x 30 1/2 x 39 5/8

30 x 32 1/2 x 68 1/8

48 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.





Low-Profile CUBERS



KML-325M_J

30"W X 27 3/8"D X 22"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KML-325MAJ	115V/60/1	300	380	5.7	185 Lbs. \$7,590
KML-325MWJ	115V/60/1	355	385	4.5	185 Lbs. \$7,760



Accessories



KML-500M_J

30"W X 27 3/8"D X 22"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KML-500MAJ	115V/60/1	400	442	5.6	185 Lbs. \$8,700
KML-500MWJ	115V/60/1	515	543	4.3	185 Lbs. \$8,900



Accessories



KML-700M_J(Z)

30"W X 27 3/8"D X 26"H


Model	Electrical	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KML-700MAJ*	115V/60/1	610	662	4.9	204 Lbs. \$10,250
KML-700MWJ	115V/60/1	660	665	3.8	202 Lbs. \$10,680
KML-700MRJZ*	115V/60/1	614	657	4.9	200 Lbs. \$10,090



Accessories

Remote Condenser
MATRIX

Use URC-9Z Condenser for Remote Air-Cooled Unit

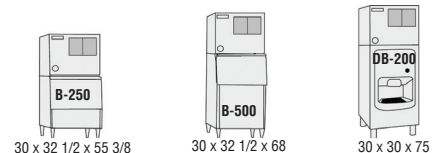

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.

*Bin graphic applies to all models on this page



CUBERS

SERENITY SERIES



KMS-822MLJ

22"W X 24 5/8"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A/70°W 70°A/50°W	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMS-822MLJ using 1 Phase Remote Condenser	115V/60/1*	770	851	5.3	150 Lbs. \$11,650



Filter

Accessories

Use SRK-10J Condenser for Remote Air-Cooled Unit (sold separately)
*115V supply for the KMS Ice maker is supplied from the SRK remote condenser



KMS-1122MLJ

22"W X 18 1/8"D X 31 1/4"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A/70°W 70°A/50°W	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMS-1122MLJ using 1 Phase Remote Condenser	115V/60/1*	1075	1151	4.2	152 Lbs. \$12,460
KMS-1122MLJ using 3 Phase Remote Condense	115V/60/3*	1100	1151	4.5	152 Lbs. \$12,460



Filter

Accessories

Use SRK-12J or SRK-12J3 Condenser for Remote Air-Cooled Unit (sold separately)
*115V supply for the KMS Ice maker is supplied from the SRK remote condenser



KMS-1402MLJ

30"W X 24"D X 28"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A/70°W 70°A/50°W	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMS-1402MLJ using 1 Phase Remote Condenser	115V/60/1*	1400	1501	4.3	178 Lbs. \$12,750
KMS-1402MLJ using 1 Phase Remote Condense	115V/60/3*	1325	1474	4.6	178 Lbs. \$12,750

Accessories

Use SRK-12J or SRK-15/15J3 Condenser for Remote Air-Cooled Unit (sold separately)
*115V supply for the KMS Ice maker is supplied from the SRK remote condenser

KMS-2000MLJ

30"W X 24"D X 32 7/8"H

Model	Electrical	Lbs. of Ice per 24 hours 90°A/70°W 70°A/50°W	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMS-2000MLJ using 1 Phase Remote Condenser	208-230V/60/1*	1850	1926	4.5	206 Lbs. \$15,720
KMS-2000MLJ using 1 Phase Remote Condense	208-230V/60/3*	1900	1938	4.3	206 Lbs. \$15,720



Filter

Accessories

Use SRK-20J or SRK-20J3 Condenser for Remote Air-Cooled Unit (sold separately)
*115V supply for the KMS Ice maker is supplied from the SRK remote condenser



Creative Cocktails

HOSHIZAKI SPECIALTY ICE



Hoshizaki's exclusive line of Specialty Ice Machines

- Create upscale signature cocktails
- Increase revenue per cocktail
- Perfect amount of chilling with minimal dilution
- Perfect for preparation & presentation

SPECIALTY ICE



1by1 Cube with Built-In Bin



IM-200BAC

39 1/2" W X 23 5/8" D X 33 1/2" H (6" Legs Included)

Filter	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
Filter	115V/60/1	150	188	8.4	212 Lbs.	\$9,260

Accessories

Self-Contained Bin Storage Capacity Up to 75 Lbs.




1by1 Cube Stackable Cuber

IM-500SAB

44" W x 27-5/8" D x 21-3/4" H

Filter	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
Filter	115V/60/1	414	489	5.8	234 Lbs.	\$11,710

Accessories

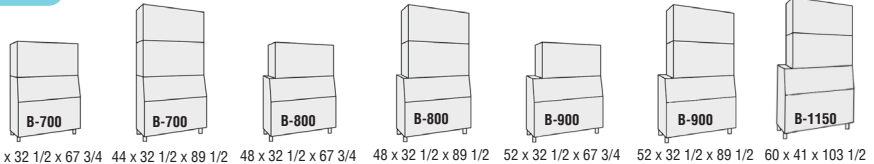

Remote Condenser
MATRIX

44 x 32 1/2 x 67 3/4 | 44 x 32 1/2 x 89 1/2 | 48 x 32 1/2 x 67 3/4 | 48 x 32 1/2 x 89 1/2 | 52 x 32 1/2 x 67 3/4 | 52 x 32 1/2 x 89 1/2 | 60 x 41 x 103 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.



Sphere Ice Machine with Built-In Bin



IM-50BAA-Q

24 3/4" W X 20 3/4" D X 39 1/2" H (6" Legs Included)

Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Cubes produced in 24 hour period	Shipping Weight	List F.O.B. Griffin
115V/60/1	45	50	15.7	~ 475	168 Lbs.	\$12,470




Self-Contained Bin Storage Capacity Up to 36 Lbs.

Accessories



2by2 Cube with Built-In Bin



IM-50BAA-LM

19 3/4" W X 17 3/4" D X 39 1/2" H (6" Legs Included)

Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Cubes produced in 24 hour period	Shipping Weight	List F.O.B. Griffin
115V/60/1	45	50	15.7	~ 172	137 Lbs.	\$12,050




Self-Contained Bin Storage Capacity Up to 22 Lbs.

Accessories



Flaker



SOFT, LIGHT, CHEWABLE, VARIOUS SHAPES

Flaked ice is relatively dry and cools more quickly than other forms of ice. A 2-second flush of the evaporator occurs every hour to reduce impurity and mineral build improving sanitation and reliability.



FLAKED ICE USAGE GUIDE

Establishment	Approximate Daily Usage
Restaurant	1.5 lbs. ice per seat
Salad Bar/Seafood Display	30 lbs. ice per ft ³
Hospital Patient Care Cafeteria	10 lbs. ice per bed 1 lb. ice per seat 6 lbs. per bed
Nursing Home	1 lb. ice per seat



Undercounter FLAKERS with Built-In Bin

F-300BAJ

36"W X 24 1/4"D X 39 1/4"H (6" Legs Included)

Filter	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
Filter	115V/60/1	247	353	6.1	221 Lbs.	\$ 11,770
Accessories						

Self-Contained Bin Storage Capacity Up to 110 Lbs.

F-500BAJ

38 1/8"W X 29 1/8"D X 42"H (6" Legs Included)

Filter	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
Filter	115V/60/1	420	536	5.1	270 Lbs.	\$ 14,320
Accessories						

Self-Contained Bin Storage Capacity Up to 170 Lbs.

F-330BAJ

24"W X 26"D X 39"H (6" Legs Included)

Filter	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
Filter	115V/60/1	243	332	5.1	178 Lbs.	\$ 11,230
Accessories						


Self-Contained Bin Storage Capacity Up to 80 Lbs.



Four 6" Legs Package (LP-6P LEG) included

*Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.






FLAKER



F-450MAJ

22"W X 27 3/8"D X 22"H

Filter	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
Accessories	115V/60/1	395	492	4.9	170 Lbs.	\$10,510



Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.




F-801M_J

22"W X 27 3/8"D X 26"H

Model	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-801MAJ★	115V/60/1	566	751	4.5	205 Lbs.	\$12,930
F-801MWJ	115V/60/1	605	680	3.9	205 Lbs.	\$13,070

Filter


Accessories



Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.



FLAKER



F-1002M_J(Z)

22"W X 27 3/8"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
F-1002MAJ	115V/60/1	758	980	4.4	210 Lbs.	\$15,510
F-1002MWJ	115V/60/1	833	955	3.6	205 Lbs.	\$15,950
F-1002MRJZ	115V/60/1	722	907	4.5	210 Lbs.	\$15,360
F-1002MLJ	115V/60/1	797	1028	1.5	205 Lbs.	\$15,220




Filter

Accessories

Remote Condenser
MATRIX

Use URC-5F Condenser for Remote Air-Cooled Unit

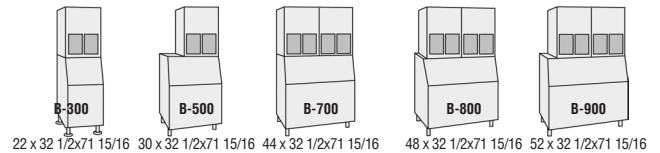

22 x 32 1/2 x 71 15/16 30 x 32 1/2 x 71 15/16 44 x 32 1/2 x 71 15/16 48 x 32 1/2 x 71 15/16 52 x 32 1/2 x 71 15/16

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.

F-1501M_J(Z)

30" W x 27-3/8" D x 34-5/8" H


Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
F-1501MAJ	208-230V/60/1	1154	1543	4.0	325 Lbs.	\$20,240
F-1501MWJ	208-230V/60/1	1410	1624	3.2	350 Lbs.	\$20,380
F-1501MRJZ	208-230V/60/1	1181	1532	4.0	325 Lbs.	\$19,720



Filter

Accessories

Remote Condenser
MATRIX



30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.



F-2001M_J(Z)(3)

30"W X 27 1/2"D X 34 5/8"H


Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
F-2001MWJ	208-230V/60/1	1840	2043	3.2	342 Lbs.	\$26,370
F-2001MRJZ	208-230V/60/1	1660	2073	3.8	360 Lbs.	\$26,230
F-2001MRJZ3	208-230V/60/3	1675	2098	3.9	360 Lbs.	\$26,370
F-2001MLJ	115V/60/1	1733	2280	0.6	250 Lbs.	\$24,320



Filter

Accessories

Remote Condenser
MATRIX



30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.



CUBELET


CHEWABLE, SOFT, SMALL NUGGET-SHAPED

Cubelet ice is hard enough to dispense - yet soft enough to soak up drink flavors for long lasting enjoyment. Thanks to its quick chill time and fan favoritism, cubelet ice is ideal for a multitude of markets such as restaurants, convenience stores, offices, and healthcare.




Cubelet

- Chewable, soft, small pellet shape
- Available in 3 sizes

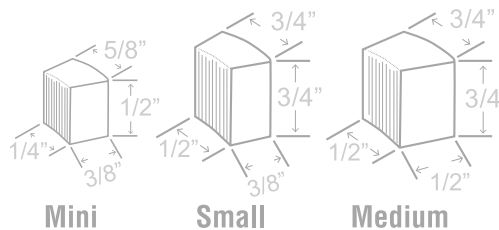

Soft Cubelet

- Smaller, softer nugget-style ice
- Scoop from bin only
(not intended for dispenser)

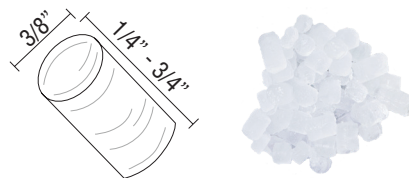

[CLICK HERE FOR Soft Cubelet Kit](#)



INFRARED BIN CONTROL

The infrared sensor shoots a beam onto the rising pile of ice and measures how much light bounces back. When the bin or dispenser is full, the beam trips the sensor, shutting down the compressor.

CLICK  TO PLAY VIDEO 



CUBELET Self-Contained

Undercounter Cubelets with Built-In Bin

C-80BAJ Mini Cubelet

14 7/8" W X 22 5/8" D X 33 1/2" H

The ADA compliant machine dimensions are 14 7/8" W x 22 5/8" D x 31 1/2" H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
C-80BAJ	115V/60/1	45	80	17.3	135 Lbs.	\$8,210
C-80BAJ-DS	115V/60/1	45	80	17.3	135 Lbs.	\$8,450
C-80BAJ-AD	115V/60/1	45	80	17.3	135 Lbs.	\$8,230
C-80BAJ-ADDS	115V/60/1	45	80	17.3	135 Lbs.	\$8,630



Filter

Accessories

Self-Contained Bin Storage Capacity Up to 22 Lbs.

UL approved for outdoor use
ADA compliant



-DS shown with Custom Cabinetry



F-330BAJ-C Mini Cubelet

24" W X 26" D X 39" H (6" Legs Included)



Filter

Accessories

Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	90°A / 70°W	70°A / 50°W			
115V/60/1	214	288	7.3	178 Lbs.	\$11,590

Self-Contained Bin Storage Capacity Up to 80 Lbs.



F-450MAJ-C Mini Cubelet

22" W X 27 3/8" D X 22" H




Filter

Accessories

Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	90°A / 70°W	70°A / 50°W			
115V/60/1	316	412	6.1	170 Lbs.	\$10,750

*Not recommended for dispensing applications.

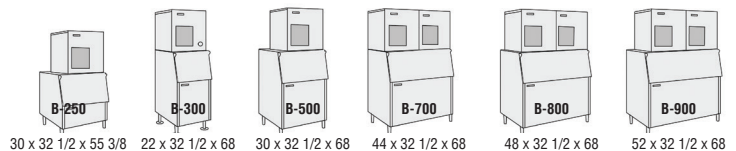

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.



†-DS Models - Wood Door System
(Designed to accommodate custom cabinetry)



CUBELET Self-Contained



F-801M_J-C Small Cubelet


22"W X 27 3/8"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
F-801MAJ-C*	115V/60/1	532	690	5.00	205 Lbs.	\$13,640
F-801MWJ-C	115V/60/1	580	632	4.13	205 Lbs.	\$13,510



Filter

Accessories



30 x 32 1/2 x 59 3/8 | 22 x 32 1/2 x 72 | 30 x 32 1/2 x 72 | 44 x 32 1/2 x 72 | 48 x 32 1/2 x 72 | 52 x 32 1/2 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

F-1002M_J(Z)-C Small Cubelet


22"W X 27 3/8"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
F-1002MAJ-C	115V/60/1	726	890	4.57	210 Lbs.	\$15,800
F-1002MWJ-C	115V/60/1	878	770	3.8	205 Lbs.	\$15,950
F-1002MRJZ-C†	115V/60/1	680	821	4.94	210 Lbs.	\$16,040



Filter

Accessories



22 x 32 1/2 x 72 | 30 x 32 1/2 x 72 | 44 x 32 1/2 x 72 | 48 x 32 1/2 x 72 | 52 x 32 1/2 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

Use URC-5FZ Condenser for Remote Air-Cooled Unit



F-1501M_J(Z)-C Medium Cubelet

30"W X 27 3/8"D X 34 7/16"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
F-1501MAJ-C	208-230V/60/1	1020	1327	4.61	325 Lbs.	\$20,640
F-1501MWJ-C	208-230V/60/1	1218	1376	3.76	330 Lbs.	\$20,760
F-1501MRJZ-C†	208-230V/60/1	1054	1353	4.50	325 Lbs.	\$20,480

Accessories

Use URC-14FZ Condenser for Remote Air-Cooled Unit

F-2001MRJZ-C Medium Cubelet

30"W X 27 3/8"D X 34 7/16"H



Filter

Accessories

Condenser

208-230V/60/1

Lbs. per 24 hours
90°A / 70°W | 70°A / 50°W

1500 | 1832

kWh per 100 Lbs.

4.35

Shipping Weight


345 Lbs.

List F.O.B. Griffin

\$26,870

Remote Condenser
MATRIX

Use URC-22FZ Condenser for Remote Air-Cooled Unit



30 x 32 1/2 x 79 1/4 | 44 x 32 1/2 x 79 1/4 | 48 x 32 1/2 x 79 1/4 | 52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 45) for top kit options based on bin size.

See Top Kit Matrix on page 45 for additional bin options.





CUBELET



FD-650M_J(Z)-C Small Cubelet

22"W X 24"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
FD-650MAJ-C	115V/60/1	495	634	5.5	185 Lbs.	\$12,710
FD-650MWJ-C	115V/60/1	520	622	4.0	185 Lbs.	\$13,020
FD-650MRJZ-C*	115V/60/1	470	588	5.0	185 Lbs.	\$12,710



Accessories

Remote Condenser
MATRIX

Use URC-5FZ Condenser for Remote Air-Cooled Unit
See Top Kit Matrix on page 45 for additional bin options.

FD-1002M_J(Z)-C Small Cubelet

22"W X 24"D X 26"H

Model	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W			
FD-1002MAJ-C	115V/60/1	726	890	4.6	210 Lbs.	\$15,870
FD-1002MRJZ-C	115V/60/1	680	821	4.9	210 Lbs.	\$15,880

Use URC-5FZ Condenser for Remote Air-Cooled Unit
See Top Kit Matrix on page 45 for additional bin options.



Accessories

Remote Condenser
MATRIX



CUBELET


SERENITY SERIES



FS-1001MLJ-C Small Cubelet

30"W X 11"D X 26"H

Filter	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W				
Accessories	115V/60/1	720	851	5.1	166 Lbs.	166 Lbs.	\$14,230



Designed for use on beverage dispensers.


Use SRC-10J Condenser for Remote Air-Cooled Unit



FS-1022MLJ-C Small Cubelet

22"W X 16 1/2"D X 26"H

Filter	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W				
Accessories	115V/60/1	730	889	5.1	150 Lbs.	150 Lbs.	\$16,080



Designed for use on beverage dispensers.


Use SRC-10J Condenser for Remote Air-Cooled Unit



FS-1501MLJ-C Medium Cubelet

30"W X 16 1/2"D X 34 1/4"H

Filter	Electrical	Lbs. per 24 hours		kWh per 100 Lbs.	Shipping Weight	Shipping Weight	List F.O.B. Griffin
		90°A / 70°W	70°A / 50°W				
Accessories	115V/60/1	1125	1386	4.75	229 Lbs.	229 Lbs.	\$17,810



Designed for use on beverage dispensers.

Use SRC-14J Condenser for Remote Air-Cooled Unit



DISPENSER

CRESCENT AND CUBELET FOR DISPENSERS

Hydration Made Easy! Options include hotel and countertop dispensers and cubelet ice & water dispensers. Each line comes in a variety of ice production and storage capacities to best fit your operation - be it a small office breakroom or a busy high-rise hotel.

Features & Benefits

- Attractive stainless steel exterior provides long life and easy maintenance
- Three dimensional agitation prevents clumping and assists in delivering ice conveniently
- DKM Hotel Dispenser features the industry's only one-piece design and is 35% quieter than other hotel dispensers
- DB Series accommodates KMEdge™ Series Cubers
- DCM Series dispenses easy to chew cubelet ice and water
- All dispensers feature built-in ice storage capacity





 **OptiServe**
TOUCHLESS ICE & WATER

- Hands free dispensing that helps eliminate cross contamination
- For sanitary use in breakroom areas, lobbies, nursing stations, cafeterias and more -
- Hoshizaki's DCM dispensers can sit on top of a counter or stand for additional storage





Ice & Water DISPENSERS

Cubelet



DCM-271BAH Mini Cubelet

16 5/8" W X 24 1/4"D X 31 3/4"H (4" Legs Included)

Accessories	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	115V/60/1	196	257	6.9	154 Lbs.	\$11,120

Self-Contained Bin Storage Capacity Up to 10 Lbs.

NOTE: DCM-271BAH is made to pair with SD-271 stand. Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.



On a counter without legs or on a stand



Floor Model
with Optional Stand
16 9/16 x 24 1/8 x 66 7/8
W x D x H



Counter-Top
with 4" Legs
16 9/16 x 24 1/8 x 31 11/16
W x D x H



DCM-300BAH Mini Cubelet

26"W X 22 1/2"D X 40"H (Unit supplied without legs)

Accessories	Condenser	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	115V/60/1	232	321	6.8	220 Lbs.	\$14,180

Self-Contained Bin Storage Capacity Up to 40 Lbs.

DCM-500B_H Small Cubelet

26"W X 22 1/2"D X 40"H (Unit supplied without legs)

Model	Condenser	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-500BAH	115V/60/1	450	618	5.6	255 Lbs.	\$17,910
DCM-500BWH	115V/60/1	512	590	4.5	255 Lbs.	\$18,050

Accessories

Self-Contained Bin Storage Capacity Up to 40 Lbs.



DCM-75_B_H Small Cubelet

34 1/16"W X 28 1/2"D X 48 1/16"H
(Unit supplied without legs)

Model	Condenser	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-752BAH	115V/60/1	576	708	5.1	345 Lbs.	\$23,410
DCM-751BWH	115V/60/1	678	782	4.8	345 Lbs.	\$23,830

Accessories

Self-Contained Bin Storage Capacity Up to 95 Lbs.



Counter-Top
26 x 22 1/2 x 40
W x D x H



Counter-Top
with Optional 6" Legs
26 x 22 1/2 x 46
W x D x H



Floor Model
with Optional Stand
26 x 22 1/2 x 72 1/2
W x D x H

FOR: DCM 300BAH/500BAH/75_BAH



Ice & Water DISPENSERS



Cubelet TOUCHLESS ICE & WATER

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

DCM-271BAH-OS Mini Cubelet

16 5/8" W X 24 1/4" D X 31 3/4" H (4" Legs Included)

Accessories	Condenser	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	115V/60/1	196	257	6.9	154 Lbs.	\$11,270

NOTE: DCM-271BAH is made to pair with SD-271 stand. Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.



On a counter without legs or on a stand

Self-Contained Bin Storage Capacity Up to 10 Lbs.



Floor Model with Optional Stand
16 5/8 x 24 1/4 x 66 7/8
W x D x H



Counter-Top with 4" Legs
16 5/8 x 24 1/4 x 31 3/4
W x D x H



DCM-300BAH-OS Mini Cubelet

26"W X 22 1/2"D X 40"H (Unit supplied without legs)

Accessories	Condenser	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	115V/60/1	232	321	6.8	240 Lbs.	\$14,620

Self-Contained Bin Storage Capacity Up to 40 Lbs.

DCM-500B_H-OS Small Cubelet

26"W X 22 1/2"D X 40"H (Unit supplied without legs)

Model	Condenser	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-500BAH-OS	115V/60/1	450	618	5.6	276 Lbs.	\$18,040
DCM-500BWH-OS	115V/60/1	512	590	4.5	269 Lbs.	\$18,270

Self-Contained Bin Storage Capacity Up to 40 Lbs.



DCM-75_B_H-OS Small Cubelet

34 1/16"W X 28 1/2"D X 48 1/16"H
(Unit supplied without legs)

Model	Condenser	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-752BAH-OS	115V/60/1	576	708	5.1	345 Lbs.	\$23,560
DCM-751BWH-OS	115V/60/1	678	782	4.8	345 Lbs.	\$24,200

Self-Contained Bin Storage Capacity Up to 95 Lbs.
Units supplied without legs

FOR: DCM 300BAH/500B_H/75_B_H



Counter-Top
26 x 22 1/2 x 40
W x D x H




Counter-Top with Optional 6" Legs
26 x 22 1/2 x 46
W x D x H



Floor Model with Optional Stand
26 x 22 1/2 x 72 1/2
W x D x H





DISPENSER




KMEdge™ DB Dispensers

DB-130H

22"W X 30"D X 53"H (6" Legs Included)

Electrical	Application Ice Storage Capacity	Dispensing Rate	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	130 Lbs.	20 lbs. / min.	N/A	220 Lbs.	\$7,870

Accessories




DB-200H

30"W X 30"D X 53"H (6" Legs Included)

Electrical	Application Ice Storage Capacity	Dispensing Rate	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	200 Lbs.	13 lbs. / min.	N/A	220 Lbs.	\$8,980

Accessories



On a counter without legs or on a stand

KMEdge™ DKM Dispensers

DKM-500B_J

30" W x 28" D x 77" H (6" Legs Included)

Model	Electrical	Lbs. per 24 hours 90°A / 70°W 70°A / 50°W		Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
DKM-500BAJ★	115V/60/1	534	545	5.6	300 Lbs.	\$17,780
DKM-500BWJ	115V/60/1	500	540	4.8	310 Lbs.	\$17,940

Accessories

Self-Contained Bin Storage Capacity Up to 140 Lbs.



Four Painted 6" Flange Legs included
Note: 90 Day Warranty on accessory parts
Ice dispensing area is ADA compliant
Only dispenses crescent ice




On a counter without legs or on a stand



DISPENSER



KMEdge™ Ice & Water Dispenser



DM-200B


30"W X 28"D X 36 3/8"H

Electrical	Application Ice Storage Capacity	Dispensing Rate	Icemaker Production per 24 hrs.	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	200 Lbs.	7.5 lbs. / min.	N/A	N/A	210 Lbs.	\$9,290

Accessories



Unit supplied without legs
Only dispenses crescent ice



Counter-Top
30 x 28 x 36 3/8
W x D x H



Counter-Top
with optional 4" legs
30 x 28 x 40 3/8
W x D x H



Cubelet Ice & Water Dispenser



DM-4420N

22"W X 30 1/2"D X 40"H

Electrical	Application Ice Storage Capacity	Dispensing Rate	Icemaker Production per 24 hrs.	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
115V/60/1	200 Lbs.	N/A	N/A	N/A	185 Lbs.	\$10,200

Accessories



Canadian Energy Performance Verified
Rendement Energetique Verified

MODwater® Water Dispenser



DWM-20A

14 7/8"W x 21 3/8"D x 16 5/8"H

Electrical	Max Volume of Chilled Water (Chilled or Sparkling)	Max Flow Rate (Chilled)	Heat Rejection	Refrigerant Type/ Charge	Min. Circuit/ Max. Fuse Size	Max Amps	Shipping Weight	List F.O.B. Griffin
120V/60/1	6.8 gal/hour	0.9 gal/min	450W	R-134a/4.23 oz	15A	9A	90 Lbs.	\$6,810

Accessories

Installation kit included
CO₂ tank must be sourced from other vendor



TYPES OF WATER DISPENSED

Chilled	Temp.	34°-36°F
Sparkling	Carbonation	3.7 Vol.
Alkaline	pH (avg.)	8.0-9.0
Hot	Factory set	185°F



ICE Storage Bins

HOSHIZAKI Ice Storage Bins are available with stainless steel exterior for easy cleaning and long-lasting attractive appearance. Sturdy construction for side-by-side or stacked installations and non-corrosive bin liner provide safe, sanitary storage of cubed or flaked ice. Foamed-in-place polyurethane insulation in all bin walls and bottom provides dependable ice storage. H-GUARD Plus® Antimicrobial Agent adds extra protection to the ice scoop (included).

B-250SF



Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
Stainless Steel	250 Lbs.	30" x 32 1/3" x 33 3/8"	110 Lbs.	\$2,680

Four 6" Painted Legs included
Refer to Top Kit Matrix for necessary configurations

B-300SF BD-300SF**



Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
B-300SF	Stainless Steel	300 Lbs.	22" x 32 1/3" x 46"	125 Lbs.	\$2,750

Four 6" Painted Flanged Legs included
Refer to Top Kit Matrix for necessary configurations

Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
BD-300SF	Stainless Steel	300 Lbs.	22" x 32 1/3" x 46"	130 Lbs.	\$2,830

For use with **KMD-410M, KMS-822M, FD-650M-C, FD-1001M-C**
**BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension

B-500SF BD-500SF**



Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
B-500SF	Stainless Steel	500 Lbs.	30" x 32 1/2" x 46"	140 Lbs.	\$3,060

Four 6" Painted Legs included
Refer to Top Kit Matrix for necessary configurations

Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
BD-500SF	Stainless Steel	500 Lbs.	30" x 32 1/2" x 46"	140 Lbs.	\$3,180

For use with **KMD-460M, KMD-530M, KMD-860M**
**BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension

Four 6" Painted Legs included



ICE Storage Bins



B-700SF

Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
Stainless Steel	700 Lbs.	44" x 32 1/3" x 46"	175 Lbs.	\$3,790

Four 6" Painted Legs included
Refer to Top Kit Matrix for necessary configurations



B-800SF

Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
Stainless Steel	800 Lbs.	48" x 32 1/3" x 46"	185 Lbs.	\$4,090

Four 6" Painted Legs included
Refer to Top Kit Matrix for necessary configurations



B-900SF

Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
Stainless Steel	900 Lbs.	52" x 32 1/3" x 46"	195 Lbs.	\$4,300

Four 6" Painted Legs included
Refer to Top Kit Matrix for necessary configurations



B-1150SS / B-1300SS

Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
B-1150SS	Stainless Steel	1148 Lbs.	48" x 41" x 60 3/16"	315 Lbs.	\$8,880
B-1300SS	Stainless Steel	1304 Lbs.	48" x 41" x 66 3/16"	330 Lbs.	\$9,190

Four 6" Stainless Steel Legs included, baffle design increases ice accessibility by 30%
Universal top included - Check Top Kit Application Guide for detail



B-1500SS / B-1650SS

Model	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
B-1500SS	Stainless Steel	1500 Lbs.	60" x 41" x 62 3/16"	360 Lbs.	\$10,020
B-1650SS	Stainless Steel	1605 Lbs.	60" x 41" x 66 3/16"	375 Lbs.	\$10,350

Four 6" Stainless Steel Legs included, baffle design increases ice accessibility by 30%
Universal top included - Check Top Kit Application Guide for detail



Intertek



DISPENSER Stands/Baggers

SD STANDS DM and DCM Series Dispensers

Model Number	Use with Ice Machine / Dispenser Model	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
SD-200	DM-200B	30" x 28" x 32 ^{13/16"}	105 lbs.	\$2,490
SD-271	DCM-271 (-OS)	16 ^{1/2"} x 24" x 35 ^{3/16"}	85 lbs.	\$1,870
SD-500	DCM-300 (-OS) / DCM-500 (-OS)	25 ^{7/8"} x 22" x 32 ^{3/4"}	90 lbs.	\$2,080
SD-750	DCM-751 (-OS) / DCM-752 (-OS)	34" x 28" x 32 ^{3/4"}	110 lbs.	\$2,510

NOTE: DCM-271BAH is made to pair with SD-271 stand.
Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.



- Heavy duty stands for floor model ice machines/dispensers
- Easy cleaning and maintenance
- Attractive stainless steel exterior
- Locking doors standard

HCD ICE BAGGING SYSTEM SERIES	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H	Shipping Weight	List F.O.B. Kloppenberg
	HCD-500B	Stainless Steel	647 Lbs.	30" x 36" x 71"	510 Lbs.	\$35,130
HCD-1000B	Stainless Steel	1078 Lbs.	48" x 36" x 71"	590 Lbs.	\$44,470	

48" heavy duty ice paddle included



TOP KIT Matrix



	22" Width	22" Width	30" Width	30" Width	44" Width	44" Width	48" Width	60" Width
	KM-350M KM-520M KM-660M F-450M F-801M F-1002M	KMD-410M† KMS-822M FD-650M-C† FD-1002M-C	KM-901M KM-1100M KM-1340M KM-1601M KML Series F-1501M F-2001	KMD-460M‡ KMD-530M‡ KMD-860M‡ KMS-1402M* KMS-2000M*	2 KM-350M 2 KM-520M 2 KM-660M IM-500S 2 F-450M 2 F-801M 2 F-1002M	2 KMD-410M 2 FD-650M-C 2 FD-1002M-C	KM-1301S KM-1400S KM-1601S KM-1900S KM-2200S KM-2600S	2 KM-901M 2 KM-1100M 2 KM-1340M 2 KM-1601M 2 KML Series 2 F-1501/2001M 2 KMD Series**†
22" Width B-300SF DB-130H	—	HS-2153 HS-5424 <i>(KMD-410 on B-300 only)</i>	N/A	N/A	N/A	N/A	N/A	N/A
BD-300SF†	N/A	—	N/A	N/A	N/A	N/A	N/A	N/A
30" Width B-250SF B-500SF	HS-2033	HS-2033 & HS-2129	—	HS-2129	N/A	N/A	N/A	N/A
BD-500SF†	N/A	N/A	N/A	— <i>(Only fits KMD Units)</i>	N/A	N/A	N/A	N/A
44" Width B-700SF	HS-2035	HS-2035 & HS-2130	HS-2034	HS-2130 & HS-2034	—	HS-2130 <i>(KMD-410M does not apply.)</i>	N/A	N/A
48" Width B-800SF	HS-2035 & HS-2032	HS-2035, HS-2032 & HS-2131	HS-2034 & HS-2032	HS-2131, HS-2034 & HS-2032	HS-2032	HS-2032 & HS-2131	—	N/A
48" Width B-1150SS B-1300SS	UNIVERSAL TOP KIT INCLUDED	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED & HS-2147	IM & F UNITS ONLY <i>(HS-5397 for IM-500)</i>	N/A	UNIVERSAL TOP KIT INCLUDED	N/A
52" Width B-900SF	HS-2035 & HS-2033	HS-2035 & HS-2033/2132	HS-2035	HS-2132 & HS-2035	HS-2033	HS-2033 & HS-2132	HS-2032	N/A
60" Width B-1500SS B-1650SS	N/A	N/A	UNIVERSAL TOP KIT INCLUDED & HS-2111	N/A	UNIVERSAL TOP KIT INCLUDED <i>(HS-5397 for IM-500)</i>	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED
30" Width DB-200H DM-200B	HS-2036 <i>(Only fits KM Units)</i>	N/A	— <i>(Only fits KML Units)</i>	N/A	N/A	N/A	N/A	N/A

— Not top kit necessary | N/A Combination of ice maker and bin is not possible

*Except KMD-410M (See 22" Wide), †BD Bins Fit 24" to 24 1/2" Deep Icemakers w/o Top Kit, ‡HS-5065 Req'd for Air Cooled KMD-460/530MAJ

KMS[§], KMD, or FD on Bin Need Top Kit Extension:

Model Number	For Use With	List F.O.B. Griffin
HS-2129	B-500 Bins	\$380
HS-2130	B-700 Bins	\$450
HS-2131	B-800 Bins	\$530
HS-2132	B-900 Bins	\$650
HS-2147	B-1150 & 1300 Bins	\$350
HS-2153	B-300 Bins	\$260
HS-5424	KMD on DB-130	\$160

§Except KMS-1122MLJ

36" Width - KMH-2100S - Fit Kloppenberg Bins Only (Sold Separately)


Model Number	Description	List F.O.B. Griffin
HS-2032	4" ABS Top Kit	\$300
HS-2033	8" ABS Top Kit	\$330
HS-2034	14" ABS Top Kit	\$330
HS-2035	22" ABS Top Kit	\$350
HS-2036	(2) 4" ABS Top Kits for KM on DB-200H	\$300
HS-2111	11.3" x 26.2" Stainless Cover/Separator	FREE
HS-2148	30" x 3.1" Stainless Cover	\$280
HS-5065	Front Panel Filter Kit for KMD-460/530M	\$810
HS-5397	Bin Control Kit for IM-500 on B-1150/1300/1500/1650	\$300



REMOTE Condenser

AIR-COOLED REMOTE CONDENSERS - URC / SRC / SRK

An Ice Machine with a **Remote Air Condenser** provides quiet operation at the icemaker location, improves efficiency, and saves energy with cooler operation. Sturdy construction and weather-resistant cabinet finish provides long life operation. Remote condensers may be installed outdoors up to 55 feet from the icemaker. For installations exceeding 55 feet, contact a Factory Technical Service Representative at 800-233-1940.

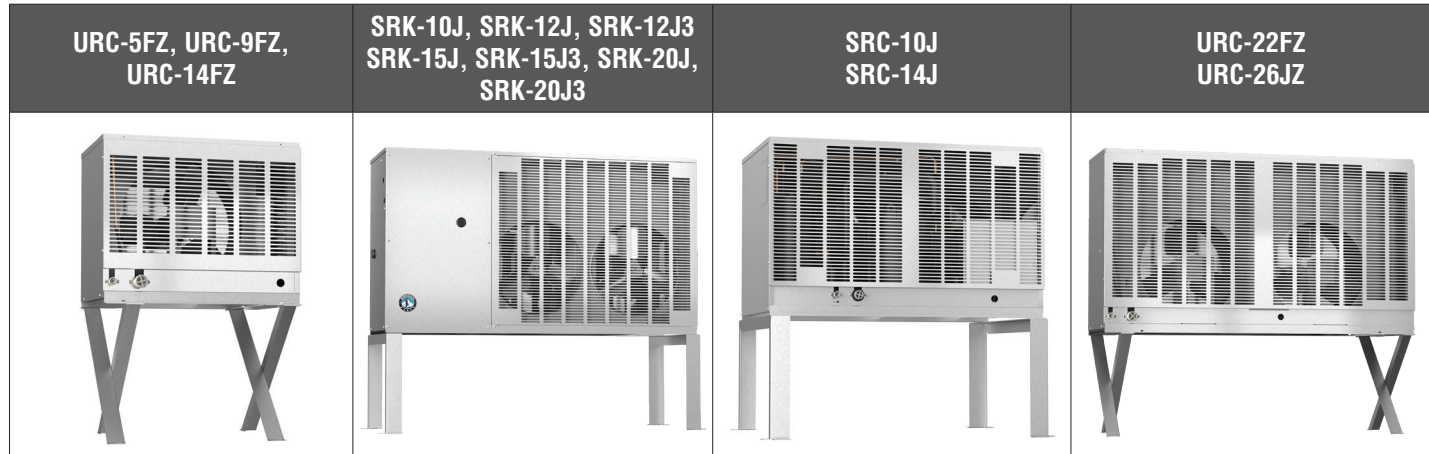

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
URC-5FZ	KM-520MRJZ, KMD-530MRJZ, KM-660MRJZ, FD-650MRJZ-C, FD-1002MRJZ-C, F-1002MRJZ-C	115V/60/1	21 ^{13/16} " x 14 ^{1/16} " x 32 ^{13/16} "	90 Lbs.	\$2,180
URC-9FZ	KML-700MRJZ, KMD-860MRJZ	115V/60/1	35 ^{11/16} " x 14 ^{1/16} " x 36 ^{1/2} "	90 Lbs.	\$2,610
SRC-10J	FS-1001MLJ-C, FS-1022MLJ-C	230V/60/1	35 ^{3/4} " x 23 ^{1/2} " x 37"	230 Lbs.	\$5,750
SRK-10J	KMS-822MLJ	230V/60/1**	38" x 29" x 37"	230 Lbs.	\$6,670
SRK-12J	KMS-1122MLJ	230V/60/1**	52 ^{3/8} " x 19 ^{1/2} " x 43"	275 Lbs.	\$7,410
SRK-12J3	KMS-1122MLJ	230V/60/3	52 ^{3/8} " x 19 ^{1/2} " x 43" **3 wire with neutral for 115V	275 Lbs.	\$7,710
SRC-14J	FS-1501MLJ-C	230V/60/1**	37 ^{3/4} " x 26 ^{5/8} " x 37"	220 Lbs.	\$7,070
SRK-15J	KMS-1402MLJ	230V/60/1	52 ^{3/8} " x 19 ^{1/2} " x 43"	275 Lbs.	\$8,230
SRK-15J3	KMS-1402MLJ	230V/60/3	52 ^{3/8} " x 19 ^{1/2} " x 43"	275 Lbs.	\$8,380

**3 wire with neutral for 115V

REMOTE Condenser



**3 wire with neutral for 115V

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
URC-14FZ	KM-901MRJZ(3), KM-1100MRJZ, KM-1301SRJZ(3), KM-1340MRJZ(3), F-1501MRJZ(-C)	115V/60/1	35 ^{11/16} " x 14 ^{1/16} " x 36 ^{1/2} "	110 Lbs.	\$2,750

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRK-20J	KMS-2000MLJ	230V/60/1	62" x 21" x 45"	345 Lbs.	\$13,960
SRK-20J3	KMS-2000MLJ	230V/60/3	62" x 21" x 45"	345 Lbs.	\$14,360

**3 wire with neutral for 115V

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
URC-22FZ	KM-1601MRJZ(3), KM-1601SRJZ(3), KM-1900SRJZ(3), KM-2200SRJZ(3), KMH-2100SRJZ3, F-2001MRJZ(3)(-C)	115V/60/1	46 ^{3/8} " x 14 ^{1/16} " x 40 ^{1/2} "	130 Lbs.	\$3,830
URC-26JZ	KM-2600SRJZ3	115V/60/1	46 ^{3/8} " x 14 ^{1/16} " x 40 ^{1/2} "	150 Lbs.	\$5,080

REMOTE CONDENSER MATRIX

Non-Precharged Line Sets - BRAZING REQUIRED

Remote Condenser	Ice Machines	Shipping Weight	25' Length	35' Length	55' Length
URC-5FZ	KM-520MRJZ, KM-660MRJZ, KMD-530MRJZ, FD-650MRJZ-C, F-1002MRJZ(-C), FD-1002MRJZ(-C)	90 Lbs.	HS-5587	HS-5588	N/A
URC-9FZ	KML-700MRJZ, KMD-860MRJZ	90 Lbs.	HS-5604	HS-5605	HS-5606
URC-14FZ	KM-901MRJZ(3), KM-1100MRJZ, KM-1301SRJZ(3), KM-1340MRJZ(3) F-1501MRJZ(-C)	100 Lbs.	HS-5604	HS-5605	HS-5606
URC-22FZ	KM-1601MRJZ(3), KM-1601SRJZ(3), KM-1900SRJZ(3) KM-2200SRJZ(3), KMH-2100SRJZ(3), F-2001MRJZ(3)(-C)	130 Lbs.	HS-5323	HS-5324	HS-5325
URC-26JZ	KM-2600SRJZ3	150 Lbs.	HS-5323	HS-5324	HS-5325

Non-Precharged Line Sets - BRAZING REQUIRED

Remote Condenser	Ice Machines	Shipping Weight	25' Length	35' Length	55' Length
SRC-10J	FS-1001MLJ-C, FS-1022MLJ-C	230 Lbs.	HS-5299*	HS-5300*	HS-5301*
SRK-10J	KMS-822MLJ	230 Lbs.	HS-0250*	HS-0251*	HS-0252*
SRK-12J SRK-12J3	KMS-1122MLJ	275 Lbs.	HS-0250*	HS-0251*	HS-0252*
SRC-14J	FS-1501MLJ-C	220 Lbs.	HS-5323*	HS-5324*	HS-5325*
SRK-15J SRK-15J3	KMS-1402MLJ	275 Lbs.	HS-0250*	HS-0251*	HS-0252*
SRK-20J SRK-20J3	KMS-2000MLJ	345 Lbs.	HS-0243*	HS-0244*	HS-0245*

*Line sets require refrigerant



WATER Filtration

Model Number	Description	Undercounter KMs	KM Cubers	IM Cubers	Flakers / Cubelet	DCMs
H9320-51 Use E-10 10" Prefilter	Single	AM-50, KM-81, 116, 161 KM-231, 301	KM-350, 520, 660 KML-325, 500, 700 KMD-410, 460, 530 DKM-500	IM-200,500 IM-50BAA-LM	All Models	All Models
H9320-52 Use E-20 20" Prefilter	Twin	N/A	KM-901, 1100, KMD-860 KMS-822, 1122, 1402	IM-50BAA-Q	N/A	N/A
H9320-53 Use E-20 20" Prefilter	Triple	N/A	KM-1301, 1340, 1601, 1900, 2200, 2600 KMH-2100 KMS-2000	N/A	N/A	N/A
H9655-11	Replacement Cartridge (1) One each					

Recommended water filter configurations based on average ice machine usage and regular filter replacement. If your operation has challenging water conditions or higher usage, then it may be necessary to use an additional filter or prefilter.

Water Filters	Description	Height of System (Manifold + Cartridge)	List F.O.B. Griffin
H9320-51	Single	18.4" H	\$570
H9320-52	Twin	19.11" H	\$960
H9320-53	Triple	19.15" H	\$1,350
H9320-54	4H-SI (medical) Single	18.1" H	\$610
H9655-11	Replacement Cartridge each	N/A	\$240
H9655-06	Replacement Cartridge (6 pk)	N/A	\$1,070
H9655-08	4H-SI (medical) Cartridge (1 pk)	18.1" H	\$420

Prefilters	Description	Height of System (Manifold + Cartridge)	List F.O.B. Griffin
9534-26	E-20 Replacement Cartridges (6 pk)	20"	\$260
9534-12	E-10 Replacement Cartridges (12 pk)	10"	\$270
9534-20	E-20 Replacement Cartridges (20 pk)	20"	\$560
9534-40	E-10 Replacement Cartridges (40 pk)	10"	\$540
9795-80	E-10 Prefilter	10"	\$330
9795-90	E-20 Prefilter	20"	\$420



EcO₃Ice Ozone System



Model Number	Description Flow Rate (Gal. per min.)	Undercounter KMs	KM Cubers	IM Cubers	Flakers / Cubelet	DCMs
HS-5282	Low Flow (.34 GPM)	AM-51B, KM-81B, KM-161B, KM-116B	N/A	N/A	All Models	N/A
HS-5283	Standard Flow (1.3 GPM)	KM-231B, KM-301B	KM-350M, KML-325M, 500M, KMD-410M, DKM-500B	IM-200BAC IM-500SAB IM-50BAA-LM	N/A	N/A
HS-5284	Fast Flow (4.2 GPM)	N/A	KM - 520M, 660M, 901M, 1100M, 1301S, 1340M, 1601M, 1601S, 1900S, 2200S, 2600S KMD - 460M, 530M, 860M, 901M, KML-700M KMS - 822M, 830M, 1122M, 1402M, 2000M KMH-2100S	IM-50BAA-Q	N/A	N/A
HS-5285	Replacement Cartridge (1) One each					

Model Number	Description	Overall Dimensions Model W x D x H	List F.O.B. Griffin
HS-5282	Low Flow (.03-.34GPM)	3.8" x 3.6" x 8.0"	\$1,020
HS-5283	Standard Flow (.34-1.3 GPM)	3.8" x 3.6" x 8.0"	\$1,020
HS-5284	Fast Flow (1.3-4.2 GPM)	5.98" x 3.6" x 9.28"	\$1,020
HS-5285	Replacement Cartridge each	N/A	\$600



HS-5282
EcO₃Ice Low Flow
Ozone System



HS-5284
EcO₃Ice Fast Flow
Ozone System



HS-5285
EcO₃Ice Ozone
System
Replacement
Cartridge

HS-5283
EcO₃Ice Standard
Flow Ozone System

EcO₃Ice™

Remote Monitoring System

For use on Hoshizaki KM Cuber ice machines

Model Number	For use with	Shipping Length	Shipping Width	Shipping Height	Shipping Weight	List F.O.B. Griffin
HS-5562	KM Cuber ice machines Not for use with KMD-410	8"	8"	3"	1 lb.	\$910
HS-5602	Flaker, Cubelet and DCM Series ice machines**	12"	12"	4"	2 lb.	\$1,250



- Performance dashboard for status, historical data
- Alert notification by email or text
- Remotely diagnose machines
- Control functions: ON/OFF, Reset, Lock-down



DEVICES



SECURE CLOUD SERVER



CELLULAR CONNECTIVITY



SMART GATEWAY



Refrigeration



Hoshizaki Steelheart® Reach-Ins are engineered to meet the tough demands of commercial kitchens, Steelheart® reach-ins offer rugged, stainless steel construction inside and out for the highest quality, durability, performance and sanitation. When space is tight, remember that Hoshizaki reach-ins, dual temps and pass-thrus can roll through standard doors for easy installation. **Hover over to see Energy Star and Georgia Made qualified products.**





WARRANTY

EFFECTIVE: January 1, 2024

Supersedes all previous price lists

TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. HOSHIZAKI reserves the right to determine point of shipment.

TERMS:

Terms are such as the Company may extend to the purchaser.

LOST OR DAMAGED SHIPMENTS:

Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment. The common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore, it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

WARRANTY

All units to be free from manufacturing defects, covered by:

Steelheart® Series Refrigerators & Freezers

- 5-Year - Labor on entire machine
- 6-Year - Parts on entire machine
- 7-year - Parts on Compressor

Compact Undercounter Refrigerators HR24 & HR15 & Back Bar Refrigerators & Glass Door Merchandisers

- 3-Year - Parts & Labor on entire machine
- 5-Year - Parts on Compressor

Economy Refrigeration Series

- 2 Year - Parts and Labor on entire machine
- 5 Year - Parts on Compressor

Warranty

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact Factory for Warranty in other Countries. Refer to manufacturer's full warranty for complete details. Suggested List Prices are intended only as a guide. This does not restrict the price seller may establish due to market conditions.

AGENCY LISTINGS and MARKS



NUMBER Identification



HORIZONTAL REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

S R 48 B - 18MD2

Series Identification

- U** Undercounter
- W** Worktop
- S** Sandwich Prep/Mega Top
- P** Pizza Prep
- C** Chef Base

Model Identification

- R** Refrigerator
- F** Freezer

Unit Width

In Inches

Series Modification

- B** Alphabetically increases per model revisions

Options Configuration

- LP / -D** Low Profile / Drawers
- # / -#D#** Number of 1/6 Sized Pan Capacity / Number of 1/6 Sized Pan Capacity with Number of Drawers in Sandwich Prep
- #M/ -#MD#** Number of 1/6 Sized Pan Capacity / Number of 1/6 Sized Pan Capacity with Number of Drawers in Mega Top
- 01** Unit with Cylinder Lock

SR48B-18MD2

Mega Top Prep Table,
Refrigerator,
48" Wide,
Revision B*,

(18) 1/6 Sized Pan Capacity in Rail,
Door and 2 Drawers*

*The series modification letter can be generally ignored when talking about the unit, this letter is important if you are getting Tech Support or ordering service parts.



UPRIGHT REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

R 1 A - FS - FS
PT & RT ONLY

Model Identification

- R** Refrigerator
- F** Freezer
- DT** Dual Temp
- PT** Pass Thru
- RN** Roll In
- RT** Roll Thru

Number of Sections

1 / 2 / 3 One, Two, or Three Sections

Series Modification

- A** Alphabetically increases per model revisions

Door Configuration

- FS / -HS** Full Height or Half Height Stainless Door
- FG / -HG** Full Height or Half Height Glass Door
- FSL / -HSL** Full Height or Half Height Stainless Door, Left-Hand Hinge

R1A-FS

Upright Refrigerator,
One Section
Revision A*,

Full Stainless Door

*The series modification letter can be generally ignored when talking about the unit, this letter is important if you are getting Tech Support or ordering service parts.





UPRIGHT Refrigerators



R1A-FS(L)* R1A-HS(L)* R2A-FS R2A-HS R2A-FSN R3A-FS R3A-HS

- Energy efficient thermostatic expansion valve
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks even when full
- Stainless steel interior and exterior front, sides and top
- Unique ducted air distribution system, maintains uniform cabinet temperatures
- 4" Heavy duty stem casters standard

Model Number	R1A-FS (L) - Left-Hand hinge**	R1A-HS (L) - Left-Hand hinge	R2A-FS	R2A-FSN	R2A-HS	R3A-FS	R3A-HS
Interior Storage Capacity (AHAM)	23.10 ft ³	23.10 ft ³	50.37 ft ³	47.11 ft ³	50.37 ft ³	79.03 ft ³	79.03 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	52" x 33.5" x 79.5"	55" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	57.75"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	20.25"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	6	9	9
Center Shelves (C)	N/A	N/A	3	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	19.75" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6 x 22.9"	21.25" x 26" (C) 6 x 22.9"
Crated Shipping Weight	345 lbs.	345 lbs.	562 lbs.	562	562 lbs.	811 lbs.	811 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	5	5	8	8	8	9.5	9.5
HACR Breaker (AMP)	15	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.25	1.25	3.47	2.85	3.47	4.39	4.39
Heat Rejection (BTU / hr)*	317	317	513	621	513	703	703
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$10,570 ** \$10,560	\$12,160	\$14,070	\$13,700	\$17,010	\$24,470	\$27,880

*Based on 100°F ambient cycling at set point



UPRIGHT Refrigerators



- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- Energy efficient thermostatic expansion valve/self contained refrigeration system
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures even when full
- 4" Heavy duty stem casters standard
- Center shelves for added storage capacity

Model Number	R1A-FG	R1A-HG	R2A-FG	R2A-HG	R3A-FG	R3A-HG
Interior Storage Capacity (AHAM)	23.10 ft ³	23.10 ft ³	50.37 ft ³	50.37 ft ³	79.03 ft ³	79.03 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.5" x 79.5"	27.5" x 34.5" x 79.5"	55" x 34.5" x 79.5"	55" x 34.5" x 79.5"	82.5" x 34.5" x 79.5"	82.5" x 34.5" x 79.5"
Depth with Doors Open at 90°	57"	57"	57"	57"	57"	57"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	9	9
Center Shelves (C)	N/A	N/A	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 22.9"	21.25" x 26" (C) 6" x 22.9"
Crated Shipping Weight	350 lbs.	350 lbs.	570 lbs.	570 lbs.	826 lbs.	826 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	5	5	8	8	9.5	9.5
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.47	2.47	5.05	5.05	6.5	6.5
Heat Rejection (BTU / hr)*	639	639	978	978	1255	1255
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$12,670	\$14,940	\$17,830	\$20,180	\$32,270	\$35,900

*Based on 100°F ambient cycling at set point





UPRIGHT Freezers



F1A-FS(L) F1A-HS(L)

F2A-FS

F2A-FSN

F2A-HS

F3A-FS

F3A-HS

- Stainless steel interior and exterior front, sides and top
- Energy efficient thermostatic expansion valve
- 4" Heavy duty stem casters standard
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks
- Unique ducted air distribution system, maintains a uniform cabinet temperatures even when full

Model Number	F1A-FS (L) - Left-Hand hinge**	F1A-HS (L) - Left-Hand hinge	F2A-FS	F2A-FSN	F2A-HS	F3A-FS	F3A-HS
Interior Storage Capacity (AHAM)	23.10 ft ³	23.10 ft ³	50.37 ft ³	47.11 ft ³	50.37 ft ³	79.03 ft ³	79.03 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	52" x 33.5" x 79.5"	55" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	57.75"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	20.25"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	6	9	9
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	19.75" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 22.9"	21.25" x 26" (C) 6" x 22.9"
Crated Shipping Weight	345 lbs.	345 lbs.	562 lbs.	562 lbs.	562 lbs.	830 lbs.	830 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	230V/60/1	230V/60/1
Amperage (AMP)	8.46	8.46	8.7	9.5	8.7	11	11
HACR Breaker (AMP)	15	15	15	15	15	20	20
Energy Consumption (kWh / day) ASHRAE	6.25	6.25	12.16	11.61	12.16	17.02	17.02
Heat Rejection (BTU / hr)*	1178	1178	1820	2184	1820	1643	1643
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	208 - 254	208 - 254
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F
Refrigerant	R290	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$12,670 **\$12,660	\$13,940	\$17,780	\$20,850	\$19,710	\$26,630	\$29,410

*Based on 100°F ambient cycling at set point



UPRIGHT Freezers/Dual Temp



- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- Dual temperature cabinets for space efficiency
- 4" Heavy duty stem casters standard even when full

Model Number	F1A-FG	F1A-HG	F2A-FG	F2A-HG	DT1A-HS	DT2A-FS
Interior Storage Capacity (AHAM) - Refrigerator Freezer	23.10 ft ³	23.10 ft ³	50.37 ft ³	50.37 ft ³	10.19 ft ³ 10.19 ft ³	23.10 ft ³ 23.10 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.5" x 79.5"	27.5" x 34.5" x 79.5"	55" x 34.5" x 79.5"	55" x 34.5" x 79.5"	27.5" x 35" x 79.5"	55" x 33.5" x 79.5"
Depth with Doors Open at 90°	57"	57"	57"	57"	61.75"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	27.75" each	59.25"
Adjustable Shelves	3	3	6	6	3	3
Center Shelves (C)	N/A	N/A	3	3	N/A	N/A
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	(L/R) 21.25" x 26" (C) 6" x 17.8"	(L/R) 21.25" x 26" (C) 6" x 17.8"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	365 lbs.	365 lbs.	602 lbs.	602 lbs.	415 lbs.	634 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	8.5	8.5	9.1	9.1	5.5	14
HACR Breaker (AMP)	15	15	15	15	15	20
Energy Consumption (kWh / day) ASHRAE	7.73	7.73	16.3	16.3	4.49	8.59
Heat Rejection (BTU / hr)*	806	806	1694	1694	168 439	376 1401
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104-126
Ambient Temp. Range	45° - 80°F	45° - 100°F	45° - 80°F	45° - 100°F	45° - 100°F	45° to 100°F
Control Set Point Range - Refrigerator Freezer	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	33° to 52°F - 10° to 10°F	33° to 52°F - 10° to 10°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$18,050	\$18,500	\$25,500	\$27,560	\$22,120	\$28,980

*Based on 100°F ambient cycling at set point





PASS-THRU Refrigerators



PT1A-FS-FS*
(Shown with door open)



PT1A-HS-HS*



PT2A-FS-FS



PT2A-HS-HS

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- 4" Heavy duty stem casters standard, two with brakes

Model Number	PT1A-FS-FS	PT1A-HS-HS	PT2A-FS-FS	PT2A-HS-HS
Interior Storage Capacity (AHAM)	24.20 ft ³	24.20 ft ³	52.50 ft ³	52.50 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 35.75" x 79.5"	27.5" x 35.75" x 79.5"	55" x 35.75" x 79.5"	55" x 35.75" x 79.5"
Depth with Doors Open at 90°	87.25"	87.25"	87.25"	87.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6
Center Shelves (C)	N/A	N/A	3	3
Shelf Dimensions (W x D)	21.25" x 30.75"	21.25" x 30.75"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"
Crated Shipping Weight	357 lbs	357 lbs	592 lbs	592 lbs
Crated Shipping Dimensions (L x W x H)	38.5" x 31.5" x 81"	38.5" x 31.5" x 81"	58" x 38.5" x 81"	58" x 38.5" x 81"
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Amperage (AMP)	5	5	8	8
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.31	1.31	3.24	3.24
Heat Rejection (BTU / hr)*	348	348	581	581
Voltage Range	104-126	104-126	104-126	104-126
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	31° to 52°F	31° to 52°F	31° to 52°F	31° to 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$20,030	\$23,020	\$27,740	\$32,720

*Based on 100°F ambient cycling at set point



PASS-THRU Refrigerators



PT1A-FG-FG

PT2A-FG-FG

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights

- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- 4" Heavy duty stem casters standard, two with brakes

Model Number	PT1A-FG-FG	PT2A-FG-FG
Interior Storage Capacity (AHAM)	24.20 ft ³	52.50 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 37.75" x 79.5"	55" x 37.75" x 79.5"
Depth with Doors Open at 90°	82.5"	82.5"
Interior Door Opening Width	21.75"	21.75"
Interior Door Opening Height	59.25"	59.25"
Adjustable Shelves	3	6
Center Shelves (C)	N/A	3
Shelf Dimensions (W x D)	21.75" x 30.75"	21.25" x 26" (C) 6" x 17.8
Crated Shipping Weight	367 lbs.	681 lbs.
Crated Shipping Dimensions (L x W x H)	41.25" x 31.5" x 81"	58" x 41.25" x 81"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	5	8
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.68	6
Heat Rejection (BTU / hr)*	653	1429
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Control Set Point Range	31° to 52°F	31° to 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$23,910	\$34,850

*Based on 100°F ambient cycling at set point





ROLL-IN Refrigerators



RN1A-FS



RN2A-FS

- Stainless steel interior and exterior front, sides and top
- Environmentally friendly R290 hydrocarbon refrigerant
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures

- Reinforced stainless steel ramp and floor accommodate Roll-In racks up to 72" tall (supplied by others)
- Made to order

Model Number	RN1A-FS	RN2A-FS
Interior Storage Capacity (AHAM)	38.13 ft ³	78.35 ft ³
Overall Dimensions (W x D x H including 4" casters)	35" x 38.9" x 87.5"	68" x 38.9" x 87.5"
Depth with Doors Open at 90°	65.25"	65.25"
Interior Door Opening Width	29.25"	29.25"
Interior Door Opening Height	72.75"	72.75"
Crated Shipping Weight	429 lbs	676 lbs
Crated Shipping Dimensions (L x W x H)	40.5" x 39" x 93.5"	72" x 40.5" x 93.75"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	6.4	8.2
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	3.186	5.06
Heat Rejection (BTU / hr)*	774	1376
Voltage Range	104-126	104-126
Ambient Temp. Range	45° to 100°	45° to 100°
Control Set Point Range	31° - 52°F	31° - 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$18,220	\$26,360

*Based on 100°F ambient cycling at set point



ROLL-THRU Refrigerators



RT1A-FS-FS



RT2A-FS-FS

- Stainless steel interior and exterior front, sides and top
- Environmentally friendly R290 hydrocarbon refrigerant
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures

- Reinforced stainless steel ramp and floor accommodate Roll-In racks up to 72" tall (supplied by others)
- Made to order

Model Number	RT1A-FS-FS	RT2A-FS-FS
Interior Storage Capacity (AHAM)	38.13 ft ³	78.35 ft ³
Overall Dimensions (W x D x H including 4" casters)	35" x 45.5" x 87.5"	68" x 45.5" x 87.5"
Depth with Doors Open at 90°	98.5"	98.5"
Interior Door Opening Width	29.25"	29.25"
Interior Door Opening Height	72.75"	72.75"
Crated Shipping Weight	459 lbs	737 lbs
Crated Shipping Dimensions (L x W x H)	40.5 x 39" x 93.5"	72" x 40.5" x 93.75"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	6.4	8.2
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	3.186	5.06
Heat Rejection (BTU / hr)*	774	1376
Voltage Range	104-126	104-126
Ambient Temp. Range	45° to 100°	45° to 100°
Control Set Point Range	31° - 52°F	31° - 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$23,440	\$33,930

*Based on 100°F ambient cycling at set point





UPRIGHT Heated Cabinets



HC1A-FS*

(Shown with top and door open)



HC1A-HS*



HC2A-FS*



HC2A-HS*

- Stainless steel interior with stainless exterior front, sides, and top
- Interior top-mounted heating element with fan to circulate heat through cabinet; heat shield foamed in next to heating element
- Additional storage fits 12 (36 for 2-section) sheet pans
- Maximum interior storage capacity with smallest external footprint
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- 4" Heavy duty stem casters standard, two with brakes

Model Number	HC1A-FS	HC1A-HS	HC2A-FS	HC2A-HS
Interior Storage Capacity (AHAM)	22.70 ft ³	22.62 ft ³	49.70 ft ³	49.50 ft ³
"Overall Dimensions (W x D x H including 4" casters)"	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	55" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	27.75"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6
Center Shelves (C)	N/A	N/A	3	3
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	340 lbs	340 lbs	578 lbs	578 lbs
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"
Voltage	115/60/1	115/60/1	208-230/60/1	208-230/60/1
Amperage (AMP)	10	10	9 (208v) /10 (230v)	9 (208v) /10 (230v)
HACR Breaker (AMP) (W) ASTM 2140-11	15	15	20	20
Energy Consumption (w) ASTM 2140-11	N/A	N/A	N/A	N/A
Voltage Range	104-126	104-126	208-254	208-254
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	140° to 180°F	140° to 180°F	140° to 180°F	140° to 180°F
List F.O.B. Griffin	\$14,300	\$14,800	\$21,000	\$22,300



UPRIGHT Heated Pass-Thrus



HC1A-FS-FS*
(Shown with top and doors open)



HC1A-HS-HS*



HC2A-FS-FS*



HC2A-HS-HS*

- Stainless steel interior with stainless exterior front, sides, and top
- Interior top-mounted heating element with fan to circulate heat through cabinet; heat shield foamed in next to heating element
- Additional storage fits 12 (36 for 2 section) sheet pans

- Maximum interior storage capacity with smallest external footprint
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- 4" Heavy duty stem casters standard, two with brakes

Model Number	HC1A-FS-FS	HC1A-HS-HS	HC2A-FS-FS	HC2A-HS-HS
Interior Storage Capacity (AHAM)	23.82 ft ³	23.68 ft ³	52.40 ft ³	52.10 ft ³
"Overall Dimensions (W x D x H including 4" casters)"	27.5" x 35.75" x 79.5"	27.5" x 35.75" x 79.5"	55" x 35.75" x 79.5"	55" x 35.75" x 79.5"
Depth with Doors Open at 90°	87.25"	87.25"	87.25"	87.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6
Center Shelves (C)	N/A	N/A	3	3
Shelf Dimensions (W x D)	21.25" x 30.75"	21.25" x 30.75"	21.25" x 30.75"	21.25" x 30.75"
Crated Shipping Weight	367 lbs	367 lbs	625 lbs	625 lbs
Crated Shipping Dimensions (L x W x H)	38.5" x 31.5" x 81"	38.5" x 31.5" x 81"	58" x 38.5" x 81"	58" x 38.5" x 81"
Voltage	115/60/1	115/60/1	208-230/60/1	208-230/60/1
Amperage (AMP)	10	10	9 (208v) /10 (230v)	9 (208v) /10 (230v)
HACR Breaker (AMP)	15	15	20	20
Energy Consumption (w) ASTM 2140-11	N/A	N/A	N/A	N/A
Voltage Range	104-126	104-126	208-254	208-254
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	140° to 180°F	140° to 180°F	140° to 180°F	140° to 180°F
List F.O.B. Griffin	\$20,400	\$20,900	\$29,300	\$30,600





UNDERCOUNTER Compact

Refrigerators



HR15A*




HR15A-G



HR24C*



HR24C-G

- Stainless steel interior and exterior
- UL approval for outdoor use
- ADA Compliant 

- Lockable stainless steel door is field reversible
- Ducted air flow for even air distribution throughout cabinet
- Interior LED lighting

Model Number	HR15A	HR15A-G	HR24C	HR24C-G
Interior Storage Capacity (AHAM)	2.54 ft ³	2.54 ft ³	3.87 ft ³	3.87 ft ³
Overall Dimensions (W x D x H including legs)	14.8" x 25.75" x 31.5"	14.8" x 25.75" x 31.5"	23.4" x 26.5" x 31.5"	23.4" x 26.5" x 31.5"
Depth with Doors Open at 90°	37.25"	37.25"	46.7"	46.7"
Adjustable Shelves	2	2	3	3
Shelves (#) / Dimensions(W x D)	(2) / 10" x 20" adjustable slide out shelf	(2) 10" x 20"	(1) / 18.5" x 17" (2) / 18.5" x 12"	(1) / 18.5" x 17" (2) / 18.5" x 12"
Crated Shipping Weight	115 lbs	115 lbs	115 lbs	115 lbs
Crated Shipping Dimensions (L x W x H)	30.6" x 18.75" x 37"	30.6" x 18.75" x 37"	26.8" x 24" x 36.6"	26.8" x 24" x 36.6"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	0.9	0.9	1.1	1.1
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.54	0.54	0.64	0.64
Heat Rejection (BTU / hr)*	145	145	648	648
Voltage Range	104 - 127	104-127	115 - 127	115 - 127
Ambient Temp. Range	45° - 90°F	45° - 90°F	45° - 100°F	45° - 100°F
Control Set Point Range	28° - 40°F	28° - 40°F	34° - 52°F	34° - 52°F
Refrigerant	R600a	R600a	R600a	R600a
List F.O.B. Griffin	\$3,340	\$4,750	\$4,280	\$5,820

*Based on 100°F ambient cycling at set point



UNDERCOUNTER Refrigerators



UR27B(-01)*



UR27B-LP*



UR36B(-01)*



UR48B(-01)*




UR60B(-01)*



UR72B(-01)*

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient

- Optional 2.25" casters for ADA Compliance 
- Field reversible doors
- Electronic controls

Model Number	UR27B UR27B-01** (01 Cylinder Door Lock)	UR27B-LP Low Profile unit meets ADA requirements	UR36B UR36B-01** (01 Cylinder Door Lock)	UR48B UR48B-01** (01 Cylinder Door Lock)	UR60B UR60B-01** (01 Cylinder Door Lock)	UR72B UR72B-01** (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft ³	6.21 ft ³	8.64 ft ³	12 ft ³	15.1 ft ³	18.27 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	27" x 30" x 31.9"	36" x 30" x 33.75"	48" x 30" x 33.75"	60" x 30" x 33.75"	72" x 30" x 33.75"
Depth with Doors Open at 90°	55.5"	55.5"	58.5"	52.5"	58.5"	52.5"
Interior Door Opening Width	22.75"	22.75"	25.5"	19.5"	25.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	1	1	1	2	2	3
Shelf Dimensions (W x D)	22" x 16"	22" x 16"	31" x 16"	21.5" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	173 lbs.	173 lbs.	204 lbs.	249 lbs.	290 lbs.	339 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	34" x 31.5" x 35.5"	40.5" x 34" x 36.5"	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"	73.75" x 32" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.7	2.7	2.5	3	3	3
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	0.65	0.69	1.05	0.927	1.12
Heat Rejection (BTU / hr)*	193	193	184	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$6,140 ** \$6,510	\$6,140	\$8,170 ** \$8,570	\$9,020 ** \$9,490	\$10,070 ** \$10,810	\$11,560 ** \$12,600

*Based on 100°F ambient cycling at set point

**SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.





UNDERCOUNTER Glass Door

Refrigerators and Freezer



UR27B-GLP01



UR48B-GLP01 ★



UF27B-GLP01

- Stainless steel interior and exterior front, sides and top
- Energy efficient LED interior lights with on/off switch
- Standard 2.25" casters (2 with brakes)

- Meets ADA requirements 
- Glass doors with locks are energy efficient multi pane, argon filled
- Field reversible glass doors

Model Number	UR27B-GLP01	UR48B-GLP01	UF27B-GLP01
Interior Storage Capacity (AHAM)	6.21 ft ³	12 ft ³	6.21 ft ³
Overall Dimensions W x D x H including (2.25" casters)	27" x 31" x 32"	48" x 31" x 32"	27" x 31" x 32"
Depth with Doors Open at 90°	55.5"	52"	55.5"
Interior Door Opening Width	22.75"	19.5"	22.75"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	2	1
Shelf Dimensions (W x D)	22" x 16"	21.5" x 16"	22" x 16"
Crated Shipping Weight	183 lbs.	249 lbs.	189 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 35.5"	52.5" x 34" x 36.5"	36" x 31.5" x 35.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.15	1.46	4.32
Heat Rejection (BTU / hr)	263	432	468
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 80°F
Temperature Range	32° - 52°F	32° - 52°F	-10° - 10°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$8,800	\$12,830	\$9,580



UNDERCOUNTER Freezers



UF27B(-01)




UF27B-LP



UF48B(-01)



UF60B(-01)*

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Optional 2.25" casters for ADA Compliance 
- Field reversible doors
- Enamel coated evaporator coil

Model Number	UF27B UF27B-01 ** (01 Cylinder Door Lock)	UF27B-LP Low Profile unit meets ADA requirements	UF48B UF48B-01 ** (01 Cylinder Door Lock)	UF60B UF60B-01 ** (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft ³	6.21 ft ³	12 ft ³	15.1 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	27" x 30" x 32"	48" x 30" x 33.75"	60" x 30" x 33.75"
Depth with Doors Open at 90°	55.5"	55.5"	52.5"	58.5"
Interior Door Opening Width	22.75"	22.75"	19.5"	25.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	22" x 16"	21.5" x 16"	27.25" x 16"
Crated Shipping Weight	175 lbs.	175 lbs.	258 lbs.	310 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	34" x 31.5" x 35.5"	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	2.4	3.6	4
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	2.4	3.6	3.95
Heat Rejection (BTU / hr)	489	509	756	727
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$7,110 **\$7,440	\$7,330	\$ 10,140 **\$ 10,890	\$ 12,610 **\$ 13,370

**SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.





UNDERCOUNTER Refrigerators

Refrigerators with Drawers



UR27B-D2




UR48B-D4



UR60B-D4



UR72B-D6

- Stainless steel interior and exterior front, sides and top
- Heavy duty drawers with removeable gaskets
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 4" Stem casters standard
- Optional 2.25" casters for ADA Compliance 
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Enamel coated evaporator coil

Model Number	UR27B-D2	UR48B-D4	UR60B-D4	UR72B-D6
Interior Storage Capacity (AHAM)	6.21 ft ³	12 ft ³	15.27 ft ³	18 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	48" x 30" x 33.75"	60" x 30" x 33.75"	72" x 30" x 33.75"
Depth with Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Crated Shipping Weight	203 lbs.	314 lbs.	346 lbs.	443 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"	73.75" x 32" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	1.05	1.75	1.12
Heat Rejection (BTU / hr)	152	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$9,370	\$15,150	\$16,970	\$22,080



UNDERCOUNTER Freezers




Freezers with Drawers



UF27B-D2



UF48B-D4

- Stainless steel interior and exterior front, sides and top
- Heavy duty drawers with removeable gaskets
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- 4" Stem casters standard
- Optional 2.25" casters for ADA Compliance 
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Electronic controls

Model Number	UF27B-D2	UF48B-D4
Interior Storage Capacity (AHAM)	6.21 ft ³	12 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	48" x 30" x 33.75"
Depth with Drawer Fully Open	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 size and (1) 1/3 size, 6" deep
Crated Shipping Weight	207 lbs.	331 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	52.5" x 34" x 36.5"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3	4
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.60
Heat Rejection (BTU / hr)	489	756
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$10,840	\$16,510





WORKTOPS Refrigerators



WR27B(-01)★



WR36B(-01)★



WR48B(-01)★



WR60B(-01)★



WR72B(-01)★

- Stainless steel interior and exterior front, sides and top
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed in place polyurethane
- Enamel coated evaporator coil
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	WR27B WR27B-01** (01 Cylinder Door Lock)	WR36B WR36B-01** (01 Cylinder Door Lock)	WR48B WR48B -01** (01 Cylinder Door Lock)	WR60B WR60B-01** (01 Cylinder Door Lock)	WR72B WR72B-01** (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft ³	8.64 ft ³	12 ft ³	15.1 ft ³	18.27 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	36" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
Depth with Doors Open at 90°	55.5"	58.5"	52.5"	58.5"	52.5"
Interior Door Opening Width x Height	22.75" x 23"	25.5" x 23"	19.5" x 23"	25.5" x 23"	19.5" x 23"
Adjustable Shelves	1	1	2	2	3
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.5" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	183 lbs.	216 lbs.	264 lbs.	302 lbs.	350 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	40.5" x 34" x 40.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"	73.75" x 32" x 36.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.7	2.5	3	3	3
HACR Breaker (AMP)	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	0.69	1.05	0.927	1.12
Heat Rejection (BTU / hr)	193	184	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$6,430 **\$6,780	\$8,640 **\$9,020	\$9,460 **\$10,180	\$10,580 **\$11,290	\$12,050 **\$13,130

**SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.



WORKTOPS Freezers



WF27B(-01)



WF48B(-01)



WF60B(-01)*

- Stainless steel interior and exterior front, sides and top
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Electronic controls
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stern casters standard

Model Number	WF27B WF27B-01** (01 Cylinder Door Lock)	WF48B WF48B-01** (01 Cylinder Door Lock)	WF60B WF60B-01** (01 Cylinder Door Lock)
Interior Storage Capacity (AHAM)	6.21 ft ³	12 ft ³	15.1 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"
Depth with Doors Open at 90°	55.5"	52.5"	58.5"
Interior Door Opening Width	22.75"	19.5"	25.5"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	2	2
Shelf Dimensions (W x D)	22" x 16"	21.38" x 16"	27.25" x 16"
Crated Shipping Weight	185 lbs.	273 lbs.	324 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	3.6	4
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.6	3.95
Heat Rejection (BTU / hr)	489	756	727
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$7,470 **\$7,800	\$10,880 **\$11,340	\$13,110 **\$13,850

**SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.





WORKTOPS Refrigerators

Refrigerators with Drawers



WR27B-D2



WR48B-D4



WR60B-D4



WR72B-D6

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 6" Stem casters standard
- Electronic controls

Model Number	WR27B-D2	WR48B-D4	WR60B-D4	WR72B-D6
Interior Storage Capacity (AHAM)	6.21 ft ³	12 ft ³	15.1 ft ³	18.27 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
Depth with Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Crated Shipping Weight	214 lbs.	332 lbs.	381 lbs.	460 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"	73.75" x 32" x 40.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	1.05	1.75	1.12
Heat Rejection (BTU / hr)	152	278	249	360
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$9,570	\$15,400	\$17,800	\$22,830



WORKTOPS Freezers



Freezers with Drawers



WF27B-D2



WF48B-D4

- Stainless steel interior and exterior front, sides and top
- Heavy duty drawers with removeable gaskets
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard
- Electronic controls

Model Number	WF27B-D2	WF48B-D4
Interior Storage Capacity (AHAM)	6.21 ft ³	12 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"
Depth with Drawer Fully Open	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 Size and (1) 1/3 Size, 6" deep
Crated Shipping Weight	218 lbs.	346 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	52.5" x 34" x 40.5"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3	4
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.60
Heat Rejection (BTU / hr)	489	756
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$11,300	\$17,000





DRAWER/DOOR Combination

Refrigerators



UR48B-D2



UR60B-D2



WR48B-D2



WR60B-D2

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Door/Drawer configuration can be located in any cabinet section
- Enamel coated evaporator coil
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Field reversible doors

Model Number	UR48B-D2	UR60B-D2	WR48B-D2	WR60B-D2
Interior Storage Capacity (AHAM)	12 ft ³	15.1 ft ³	12 ft ³	15.1 ft ³
Overall Dimensions (L x W x H)	48" x 30" x 33.75" (including 4" casters)	60" x 30" x 33.75" (including 4" casters)	48" x 30" x 40" (including 6" casters)	60" x 30" x 40" (including 6" casters)
Depth With Door Open At 90°	52.5"	58.5"	52.5"	58.5"
Depth With Drawer Fully Open	52"	52"	52.5"	52"
Door Opening Width x Height	19.5" x 23"	25.5" x 23"	19.5" x 23"	25.5" x 23"
Shelves (#) / Dimensions(W x D)	(1) / 21.5" x 16"	(1) / 27.25" x 16"	(1) / 21.5" x 16"	(1) / 27.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pans, 6" deep	12" x 20" x 6" deep (1) full size pan, 6" deep	(1) 1/2 and (1) 1/3 size pans, 6" deep	12" x 20" x 6" deep (1) full size pan, 6" deep
Crated Shipping Weight	282 lbs.	292 lbs.	295 lbs.	346 lbs.
Crated Shipping Dimensions (L x W x H)	52.5" x 34" x 36.5"	62.5" x 34" x 36.5"	52.5" x 34" x 40.5"	62.5" x 34" x 40.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	1.05	1.75	1.05	1.75
Heat Rejection (BTU / hr)	278	249	278	249
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F. O. B. Griffin	\$12,010	\$13,370	\$12,330	\$13,740

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. Please check with your distributor for availability.



PREP TABLE Sandwich Tops



Refrigerators



SR27B-8



SR36B-10



SR48B-8



SR48B-12

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" Cutting board standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Field reversible doors

Model Number	SR27B-8	SR36B-10	SR48B-8	SR48B-12
Interior Storage Capacity (AHAM)	6.21 ft ³	8.7 ft ³	12 ft ³	12 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 44.25"	36" x 30" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth with Cutting Board installed	30.5"	30.5"	30.5"	30.5"
Depth with Doors Open at 90°	55.5"	57.5"	52.5"	52.5"
Interior Door Opening Width	22.75"	25.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.25" x 16"	21.25" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	8	10	8	12
Crated Shipping Weight	202 lbs.	245 lbs.	292 lbs.	301 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 31.5" x 46.5"	40.5" x 32" x 46.5"	52.5" x 36" x 46.5"	52.5" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	2.7	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	2.6	2.38	2.38
Heat Rejection (BTU / hr)	361	364.1	403	403
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$7,210	\$9,810	\$9,770	\$10,890





PREP TABLES Sandwich Tops

Refrigerators



- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" Cutting board standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Field reversible doors

Model Number	SR60B-8	SR60B-12	SR60B-16	SR72B-12	SR72B-16	SR72B-18
Interior Storage Capacity (AHAM)	14.8 ft ³	14.8 ft ³	14.8 ft ³	18 ft ³	18 ft ³	18 ft ³
Overall Dimensions (W x D x H including 6" casters)	60" x 30" x 44.25"	60" x 30" x 44.25"	60" x 30" x 44.25"	72" x 30" x 44.25"	72" x 30" x 44.25"	72" x 30" x 44.25"
Depth with Cutting Board installed	30.5"	30.5"	30.5"	30.5"	30.5"	30.5"
Depth with Doors Open at 90°	58.5"	58.5"	58.5"	52.5"	52.5"	52.5"
Interior Door Opening Width	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	2	2	3	3	3
Shelf Dimensions (W x D)	27.25" x 16"	27.25" x 16"	27.25" x 16"	22" x 16"	22" x 16"	22" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	8	12	16	12	16	18
Crated Shipping Weight	346 lbs.	348 lbs.	359 lbs.	404 lbs.	406 lbs.	419 lbs.
Crated Shipping Dimensions (L x W x H)	61.75" X 32" X 46.5"	61.75" X 32" X 46.5"	61.75" X 32" X 46.5"	73.75" x 32" x 46.5"	73.75" x 32" x 46.5"	73.75" x 32" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	4	4	4	4	4
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	4.05	4.05	4.05	5.05	5.05	5.05
Heat Rejection (BTU / hr)	575	575	575	719	719	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$11,790	\$12,050	\$11,770	\$13,890	\$14,080	\$13,410



PREP TABLES Sandwich Tops



Refrigerators with Drawers



SR27B-8D2



SR48B-12D4



SR48B-12D2**

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" Cutting board standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	SR27B-8D2	SR48B-12D4	SR48B-12D2
Interior Storage Capacity (AHAM)	6.22 ft ³	12 ft ³	12 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth With Cutting Board Installed	30.5"	30.5"	30.5"
Depth With Door Open At 90°	N/A	N/A	52.5"
Depth With Drawer Fully Open	52"	52"	52"
Door/Drawer Opening Width	19.5"	19.5"	19.5"
Adjustable Shelves / Shelf Dimensions (WxD)	N/A	N/A	(2) 21.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 12 x 20 full size pan and (2) 1/4 size pans. Bottom drawer will accommodate (1) full size pan.	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pans 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	8 (6" max. pan depth)	12 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	242 lbs	382 lbs.	355 lbs.
Crated Shipping Dimensions (L x W x H)	32"x 31.5" x 46.5"	52.5" x 36" x 46.5"	52.5" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	3	3
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	2.54	2.83	2.83
Heat Rejection (BTU / hr)	361	403	403
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$10,840	\$16,770	\$14,480

**Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable.





PREP TABLES Mega Tops

Refrigerators



SR27B-12M



SR36B-15M



SR48B-12M



SR48B-18M

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans
- 1/2" x 10" Cutting board with extended top for greater stability
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	SR27B-12M	SR36B-15M	SR48B-12M	SR48B-18M
Interior Storage Capacity (AHAM)	6.22 ft ³	8.7 ft ³	12 ft ³	12 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 34" x 44.25"	36" x 34" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth with Cutting Board installed	36.5"	36.5"	36.5"	36.5"
Depth with Doors Open at 90°	52.5"	58.5"	52.5"	52.5"
Interior Door Opening Width	22.75"	25.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.5" x 16"	21.2" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	12	15	12	18
Crated Shipping Weight	217 lbs.	258 lbs.	303 lbs.	315 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 46.5"	40.5" x 36" x 46.5"	52.5" x 36" x 46.5"	52.5" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	2.3	3	3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	1.82	2.83	2.83
Heat Rejection (BTU / hr)	361	258	403	403
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$8,380	\$10,610	\$12,190	\$12,070



PREP TABLES Mega Tops



Refrigerators



- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans
- 1/2" x 10" Cutting board with extended top for greater stability
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	SR60B-12M	SR60B-18M	SR60B-24M	SR72B-18M	SR72B-24M	SR72B-30M
Interior Storage Capacity (AHAM)	14.8 ft ³	14.8 ft ³	14.8 ft ³	18 ft ³	18 ft ³	18 ft ³
Overall Dimensions (W x D x H including 6" casters)	60" x 34" x 44.25"	60" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"
Depth With Cutting Board Installed	36.5"	36.5"	36.5"	36.5"	36.5"	36.5"
Depth With Doors Open At 90°	58.5"	58.5"	58.5"	52.5"	52.5"	52.5"
Interior Door Opening Width	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	2	2	2	2	2
Shelf Dimensions (W x D)	27.25" x 16"	27.25" x 16"	27.25" x 16"	22" x 16"	22" x 16"	22" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	12	18	24	18	24	30
Crated Shipping Weight	346 lbs.	368 lbs.	383 lbs.	418 lbs.	435 lbs.	449 lbs.
Crated Shipping Dimensions (L x W x H)	61.75" x 36" x 46"	61.75" x 36" x 46"	61.75" x 36" x 46"	73.75" x 36" x 4.5"	73.75" x 36" x 46"	73.75" x 36" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	4	4	4	4	4
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	4.05	4.05	4.05	4.77	4.77	4.77
Heat Rejection (BTU / hr)	575	575	575	719	719	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$13,760	\$13,980	\$13,580	\$15,910	\$16,170	\$15,440





PREP TABLES Mega Tops

Refrigerators with Drawers



SR27B-12MD2



SR48B-18MD4



SR60B-24MD4



SR72B-30MD6

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- 1/2" x 10" Cutting board with extended top for greater stability
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 6" Stem casters standard

Model Number	SR27B-12MD2	SR48B-18MD4	SR60B-24MD4	SR72B-30MD6
Interior Storage Capacity (AHAM)	6.22 ft ³	12 ft ³	14.8 ft ³	18 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 34" x 44.25"	48" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"
Depth With Cutting Board Installed	36.5"	36.5"	36.5"	36.5"
Depth With Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	12 (6" max. pan depth)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	254 lbs.	382 lbs.	457 lbs.	539 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 46.5"	52.5" x 36" x 46.5"	62.5" x 36" x 46.5"	73.75" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	3	4	4
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	2.83	4.05	5.05
Heat Rejection (BTU / hr)	361	403	575	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$12,750	\$ 18,570	\$21,780	\$26,640



PREP TABLES Mega Tops



Drawer/Door Combinations



SR48B-18MD2



SR60B-24MD2



SR72B-30MD2



SR72B-30MD4

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Door/Drawer configuration can be located in any cabinet section
- Field reversible doors

Model Number	SR48B-18MD2	SR60B-24MD2	SR72B-30MD2	SR72B-30MD4
Interior Storage Capacity (AHAM)	12 ft ³	14.8 ft ³	18 ft ³	18 ft ³
Overall Dimensions (W x D x H including 6" casters)	48" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"
Depth with Cutting Board installed	36.5"	36.5"	36.5"	36.5"
Depth with Door Open at 90°	52"	58.5"	52.5"	52.5"
Depth With Drawer Fully Open	52.5"	52"	52"	52"
Shelves (#) / Dimensions (WxD)	(2) / 21.25" x 16"	(1) / 27.25" x 16"	(2) / 22" x 16"	(1) / 22" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) full size pan 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	355 lbs.	420 lbs.	475 lbs.	510 lbs.
Crated Shipping Dimensions (L x W x H)	52.5" x 36" x 46.5"	62.5" x 36" x 46.5"	73.75" x 36" x 46.5"	73.75" x 36" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	4	4	4
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.83	4.05	5.05	5.05
Heat Rejection (BTU / hr)	403	575	719	719
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$15,790	\$19,570	\$21,390	\$23,890

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. Please check with your distributor for availability.





PREP TABLES Pizza

Refrigerators



PR46B



PR60B



PR67B



PR93B

- Stainless steel interior and exterior front, sides and top
- Adjustable ducted air distribution for rail/cabinet
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Full complement of 1/3rd size pans are standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- 1/2" x 19" Cutting board standard
- Night/Day Mode- when lid is open set point drops to keep food cool in rail; when lid is closed set point returns to normal so food can stay in rail overnight without freezing

Model Number	PR46B	PR60B	PR67B	PR93B
Interior Storage Capacity (AHAM)	11.23 ft ³	16.63 ft ³	19.29 ft ³	29.3 ft ³
Overall Dimensions (W x D x H including 6" casters)	46" x 33.25" x 43.25"	60" x 33.25" x 43.25"	67" x 32.25" x 43.25"	93" x 33.25" x 43.25"
Depth with Cutting Board installed	36.25"	36.25"	36.25"	35.25"
Depth with Doors Open at 90°	59.5"	53.75"	56.75"	56.75"
Interior Door Opening Width	25.5"	19.5"	22.5"	22.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	2	4	4	6
Shelf Dimensions (W X D)	28.75" x 25.5"	21.5" x 25.5"	24.75" x 25.5"	24.75" x 25.5"
Pan Capacity (# of 1/3 size x 4" deep)	6 (6" max. pan depth)	8 (6" max. pan depth)	9 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	336 lbs.	410 lbs.	439 lbs.	578 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 45"	63.75" x 35.75" x 45"	70.75" x 35.75" x 45"	96.75" x 35.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	4	6	6
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	5.69	5.63	6.26	7.31
Heat Rejection (BTU / hr)	808	801	890	1039
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Control Set Point Range	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)
Refrigerant	R290	R290	R290	R290
List F. O. B. Griffin	\$13,680	\$17,770	\$18,770	\$24,390



PREP TABLES Pizza



Refrigerators with Drawers



PR46B-D2



PR60B-D4



PR67B-D4



PR93B-D6

- Stainless steel interior and exterior front, sides and top
- Adjustable ducted air distribution for rail/cabinet
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Cabinet and drawers are insulated with 2" of CFC free, foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- 1/2" x 19" Cutting board standard
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Night/Day Mode- when lid is open set point drops to keep food cool in rail; when lid is closed set point returns to normal so food can stay in rail overnight without freezing

Model Number	PR46B-D2	PR60B-D4	PR67B-D4	PR93B-D6
Interior Storage Capacity (AHAM)	11.23 ft ³	16.63 ft ³	19.29 ft ³	29.34 ft ³
Overall Dimensions (W x D x H including casters)	46" x 32.25" x 43.25"	60" x 33.25" x 43.25"	67" x 33.25" x 43.25"	93" x 33.25" x 43.25"
Depth with Cutting Board installed	35.25"	35.25"	36.25"	36.25"
Depth with Drawer Fully Open	56.5"	56.5"	57.5"	57.5"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	6	8	9	12
Crated Shipping Weight	383 lbs.	450 lbs.	531 lbs.	711 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 45"	63.75" x 35.75" x 45"	70.75" x 35.75" x 45"	95.75" x 35.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4	4	6	6
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	5.69	5.63	6.26	7.31
Heat Rejection (BTU / hr)	808	801	890	1039
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Control Set Point Range	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° - 36°F (rail) / 28° to 40°F (cabin)	16° - 36°F (rail) / 28° to 40°F (cabin)
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$17,450	\$19,730	\$25,890	\$35,680





PREP TABLES Pizza

Drawer/Door Combinations



PR67B-D2



PR93B-D2



PR93B-D4

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Door/Drawer configuration can be located in any cabinet section
- Enamel coated evaporator coil
- Adjustable ducted air distribution for rail/cabinet
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Night/Day Mode- when lid is open set point drops to keep food cool in rail; when lid is closed set point returns to normal so food can stay in rail overnight without freezing

Model Number	PR67B-D2	PR93B-D2	PR93B-D4
Interior Storage Capacity (AHAM)	19.29 ft ³	29.3 ft ³	29.3 ft ³
Overall Dimensions (W x D x H including 6" casters)	67" x 33.25" x 43.25"	67" x 33.25" x 43.25"	67" x 33.25" x 43.25"
Depth with Cutting Board installed	36.25"	36.25"	36.25"
Depth with Door Open at 90°	57.75"	56.75"	56.75"
Depth with Drawer Fully Open	57.5"	56.5"	56.5"
Door Opening Width	22.5"	22.5"	22.5"
Door Opening Height	23"	23"	23"
Shelves (#) / Dimensions (WxD)	(2) / 24.75" x 25.5"	(4) / 24.75" x 25.5"	(4) / 24.75" x 25.5"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	9	12	12
Crated Shipping Weight	486 lbs.	620 lbs.	675 lbs.
Crated Shipping Dimensions (L x W x H)	70.75" x 35.75" x 45"	96.75" x 35.75" x 45"	96.75" x 35.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	6	6
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	6.26	7.31	7.31
Heat Rejection (BTU / hr)	890	1039	1039
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F
Temperature Range	16° - 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)	16° to 36°F (rail) / 28° to 40°F (cabin)
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$22,340	\$28,460	\$32,260

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. Please check with your distributor for availability.



Intertek

Intertek

EQUIPMENT Stands



Refrigerator Equipment Stands



CR36A



CR49A



CR60A



CR72A



CR85A



CR98A



CR110A

- Stainless steel interior and exterior front, sides and top
- 16 gauge stainless steel top with marine edge front and rear and 1" turn-up at each end
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Top is provided with an exclusive, built in, ceramic heat shield
- Standard with (4-8) 4" casters all with brakes
- Electronic controls

Model Number	CR36A	CR49A	CR60A	CR72A	CR85A	CR98A	CR110A
Interior Storage Capacity (AHAM)	6.12 ft ³	9.52 ft ³	9.52 ft ³	15.44 ft ³	18.95 ft ³	22.2 ft ³	22.2 ft ³
Overall Dimensions (W x D x H including 4" casters)	36.5" x 32.25" x 27"	49" x 32.25" x 27"	60.5" x 32.25" x 27"	72.52" x 32.25" x 27"	85" x 32.25" x 27"	98" x 32.25" x 27"	110.5" x 32.25" x 27"
Depth with Drawer Fully Open	55.75"	55.75"	55.75"	55.75"	55.75"	55.75"	55.75"
Maximum Pan Depth	6"	6"	6"	6"	6"	6"	6"
Worktop Maximum Load Capacity	700 lbs	700 lbs	700 lbs	1200 lbs	1200 lbs	1500 lbs	1500 lbs
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pans and (1) 1/2 long pan 6" deep (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	Left drawers: (3) 12" x 20" x 6" deep pans Right drawers: (2) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans
Pan Capacity (12" x 20")	2	2.5	2.5	8	10	12	12
Crated Shipping Weight	295 lbs.	327 lbs.	370 lbs.	500 lbs.	567 lbs.	640 lbs.	671 lbs.
Crated Shipping Dimensions (L x W x H)	38" x 34.5" x 30.5"	51" x 35.5" x 30.5"	62" x 35.5" x 30.5"	74" x 34.5" x 30.5"	87.25" x 34.5" x 30.5"	100" x 34.5" x 30.5"	112.5" x 34.5" x 30.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.2	2.7	2.7	3.0	3.0	3.0	3.0
HACR Breaker (AMP)	15	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	1.6	2.1	2.1	2.78	2.9	3.69	3.69
Heat Rejection (BTU / hr) @ NSF	223	303	303	395	415	525	525
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$18,210	\$19,800	\$20,610	\$23,660	\$27,560	\$30,680	\$31,630



GLASS DOOR MERCHANDISER FREEZER



- ▶ Silver painted galvanized steel exterior and interior with NSF approved white steel interior and stainless steel floor
- ▶ Forced air evaporator for quick temperature pull down
- ▶ Energy saving hot gas loop and an electric glass door heater

Model Number	FM-23-HC
Overall Dimensions (W x D x H) Including Leveling Feet	30" x 29.75" x 78"
Adjustable Shelves	5
Shelf Dimensions (W x D)	24.56" x 23.25"
Crated Shipping Weight	385 lbs.
Crated Shipping Dimensions (L x W x H)	33" x 32.5" x 85.25"
Voltage	115V/60/1
Amperage (AMP)	4.8
HACR Breaker (AMP)	15
Voltage Range	104 - 127
Ambient Temp. Range	60° - 86°F
Control Set Point Range	-10° to -0°F
Refrigerant	R290
List F.O.B. Griffin	\$13,000



GLASS DOOR Merchandisers



GDM models are also available in white and black.



RM-7-HC

RM-10-HC*

RM-26-HC*

RM-45-SD-HC*
(Sliding doors)

RM-49-HC*

RM-65-HC

- Environmentally friendly R290 hydrocarbon refrigerant
- Forced air evaporator for quick temperature pull down
- Large glass door(s) is energy efficient low-E multi pane glass

- Doors mounted on heavy duty hinges with self-closing mechanism
- Three year parts and labor warranty & Five year compressor warranty
- Locks on doors are standard (accept for RM-7-HC)

Model Number	RM-7-HC	RM-10-HC	RM-26-HC	RM-45-SD-HC	RM-49-HC	RM-65-HC
Color Options	grey (as shown), black, white	grey (as shown), black, white	grey (as shown), black, white	grey (as shown), black, white	grey (as shown), black, white	grey (as shown), black, white
Interior Storage Capacity (AHAM)	7 ft ³	10 ft ³	26 ft ³	38.26 ft ³	49 ft ³	56.04 ft ³
Capacity	20 oz. bottles: 102 12 oz. cans: 217	20 oz. bottles: 168 12 oz. cans: 384	20 oz. bottles: 360 12 oz. cans: 900	20 oz. bottles: 560 12 oz. cans: 1260	20 oz. bottles: 630 12 oz. cans: 1440	20 oz. bottles: 830 12 oz. cans: 1926
Overall Dimensions (W x D x H Including Leveling Feet)	21" x 25.25" x 39"	25" x 22.5" x 54.75"	29.75" x 29.75" x 79.75"	51" x 29" x 79.5"	60" x 29.75" x 78"	78" x 29.75" x 78"
Adjustable Shelves	2 adjustable, 1 floor shelf	3	5	5 per section	5 per section	5 per section
Shelf Dimensions (W x D)	17.75" x 20.75" 18" x 9.25" (Floor)	21" x 17.5"	25.75" x 24"	23" x 20.5"	27" x 21.75"	(C) 27.3" x 21.7" (L/R) 22.4" x 21.7"
Crated Shipping Weight	180 lbs.	230 lbs.	331 lbs.	520 lbs.	610 lbs.	800 lbs.
Crated Shipping Dimensions (L x W x H)	28" x 24.5" x 44"	30" x 28" x 60"	34" x 34" x 82"	54" x 32.25" x 84"	63" x 32.25" x 86"	81" x 32.25" x 84"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3.2	1.8	3.5	6.5	7.6	8.2
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ENERGY STAR / DOE	1.38	1.1	1.81	4.55	4.37	5.67
Approx. Nominal Compress BTU/HR (HP)	1/8HP	1/5HP	1/3HP	1/2HP	1/2HP	(L) 1/3HP (R) 1/3HP
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F
Factory Set Point Range	35° - 44°F	35° - 43°F	35° - 44°F	38° - 47°F	35° - 44°F	35° - 43.5°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$5,390	\$5,930	\$7,810	\$11,540	\$12,030	\$16,050





HOSHIZAKI
BACK★BAR
 REFRIGERATION SERIES

Stainless steel interior and LED lights on BB & DD models

Black vinyl coated exterior front, sides, and rear

Polished stainless-steel **insulated towers** with plated brass faucets

Keg cushions standard with DD models—protects floor and allows air flow around kegs

Heavy duty 18-gauge stainless steel top

Stainless steel threshold **protects DD door frame** from damage when loading and unloading

Front breathing, side mount refrigeration for **zero clearance** and easy accessibility

All units **standard with locks** in each section



BB Series
Back Bar Refrigerators
 with **Swing Door**
 (Solid or Glass)

59" to 95" Models

DD Series
Direct Draw Refrigerator with
Swing Door

24" to 95" Models

CC Series
Bottle Coolers with
Slide Top

50" to 95" Models



HOSHIZAKI

BACK BAR Refrigerators



BB59



BB69



BB80



BB95

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Doors come with a stainless steel interior liner are self-closing and include locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	BB59(-S*)	BB69(-S*)	BB80(-S*)	BB95(-S*)
Cabinet Dimensions W x D x H	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity (AHAM) cu ft	18.16 ft ³	21.8 ft ³	28.74 ft ³	32.53 ft ³
Capacity 12oz. cans	852	1014	1092	1302
Door(s)	2	2	3	3
Shelves	4	4	6	6
Capacity 1/2 Barrels	3	3	4	5
HP	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.5	2.5	2.5
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	62.5" x 31.25" x 42.75"	72.5" x 31.25" x 42.75"	82.5" x 31.25" x 42.75"	98.5" x 31.25" x 42.75"
Shipping Weight	315 lbs. 320(-S*) lbs.	350 lbs. 390(-S*) lbs.	375 lbs. 420(-S*) lbs.	450 lbs. 480(-S*) lbs.
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$8,420 *\$10,404	\$9,200 *\$10,780	\$10,630 *\$13,370	\$10,820 *\$13,560

*(-S) Stainless Steel Exterior option available - Made to order.





BACK BAR Refrigerators

Refrigerators with Glass Doors



BB59-G



BB69-G



BB80-G



BB95-G

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Energy efficient Low-E Multi pane glass self-closing doors come standard with barrel locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	BB59-G(-S*)	BB69-G(-S*)	BB80-G(-S*)	BB95-G(S*)
Capacity (AHAM) cu ft	18.45 ft ³	21.80 ft ³	26.74 ft ³	32.53 ft ³
Cabinet Dimensions W x D x H	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity 12oz. cans	852	1014	1092	1302
Door(s)	2	2	3	3
Shelves	4	4	6	6
Capacity 1/2 Barrels	3	3	4	5
HP	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.5	2.5	2.5
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	62.5" x 31.25" x 42.75"	72.5" x 31.25" x 42.75"	82.5" x 31.25" x 42.75"	98.5" x 31.25" x 42.75"
Shipping Weight	310 lbs. 330(-S*) lbs.	345 lbs. 395(-S*) lbs.	370 lbs. 430(-S*) lbs.	435 lbs. 490(-S*) lbs.
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$8,820 *\$10,180	\$9,960 *\$11,570	\$11,760 *\$13,730	\$11,970 *\$14,380

*(-S) Stainless Steel Exterior option available - Made to order.




SLIDE TOP Bottle Coolers



CC50



CC65



CC80



CC95

- Stainless steel interior
- Heavy duty 18-gauge stainless steel top
- Front breathing, side mount refrigeration is easily accessible by sliding out front for cleaning and service
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Durable stainless steel slide top lids including locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	CC50(-S*)	CC65(-S*)	CC80(-S*)	CC95(-S*)
Capacity (AHAM) cu ft	14.4 ft ³	19.6 ft ³	24.67 ft ³	27.98 ft ³
Cabinet Dimensions† W x D x H	50.5" x 31.25" x 39"	65.5" x 26.5" x 33.38"	80" x 26.5" x 33.38"	95" x 26.5" x 33.38"
Capacity 12oz. / 20oz. Cans	704 / 286	890 / 360	1150 / 547	1408 / 672
Lids	2	2	3	3
Bin Dividers	3	4	6	7
HP	1/4	1/3	1/3	1/2
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.0	2.0	2.0	2.0
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	53.5" x 31.25" x 39"	68.5" x 31.25" x 39"	82.5" x 31.25" x 39"	98.5" x 31.25" x 39"
Shipping Weight	235 lbs.	275 lbs.	315 lbs.	355 lbs.
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$6,950 *\$8,320	\$7,720 *\$9,030	\$9,740 *\$11,140	\$10,290 *\$11,810

*(-S) Stainless Steel Exterior option available - Made to order.

† Does not include 1" rear cabinet bumper or bottle cap catcher depth





DIRECT DRAW Refrigerators



- Stainless steel interior
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Heavy duty 18-gauge stainless steel top

- Stainless steel threshold protects door frame from damage when loading and unloading
- Polished stainless-steel insulated towers with plated brass faucet
- Keg cushions standard to protect floor and increase air flow around kegs

Model Number	DD24(-S*)	DD59(-S*)	DD69(-S*)	DD80(-S*)	DD95(-S*)
Capacity (AHAM) cu ft	7.46 ft ³	18.45 ft ³	21.8 ft ³	28.74 ft ³	32.53 ft ³
Cabinet Dimensions W x D x H	24.88" x 30" x 39.38"	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Door(s)	1	2	2	3	3
Tower(s)	1	2	2	2	2
Tap(s)	1	3	3	4	4
Capacity 1/2 Barrels	1	2**	3	4	5
HP	1/6	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	1.5	2.5	2.5	2.5	2.5
NEMA Plug	5-15P	5-15P	5-15P	5-15P	5-15P
Shipping Dimensions W x D x H	34.5" x 29" x 45.5"	62.5" x 31.25" x 42.5"	72.5" x 31.25" x 42.5"	82.5" x 31.25" x 42.5"	98.5" x 31.25" x 42.5"
Shipping Weight	175 lbs.	345 lbs. 310(-S*) lbs.	360 lbs. 350(-S*) lbs.	385 lbs. 375(-S*) lbs.	430 lbs. 420(-S*) lbs.
Refrigerant	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$6,150 *\$7,590	\$10,260 *\$11,800	\$10,980 *\$13,830	\$12,020 *\$14,200	\$12,210 *\$14,830

*(-S) Stainless Steel Exterior option available - Made to order.

** DD59 will also accommodate (1)1/4 slim keg.

SUSHI Cases



Features & Benefits of HOSHIZAKI Sushi Cases

- Energy efficient LED lights with on/off switch
- Elegant curved front glass design enhances product on display
- Condenser airflow comes in the back and out the side
- Large diameter 1" drain at front, vinyl hose included
- NSF approved thermometer
- Easy to clean ceiling
- Plate space on top of unit, 5.6 inches
- Larger front to back interior, 11 inches
- Interior floor has a radius at all four sides
- Self-contained refrigeration unit - easy to install
- Large diameter upper evaporator with tin plating
- Slightly taller doors with plastic seal at end, opposite of the handle
- Solid food plates with radius groove to fit sushi foods
- Energy-efficient and environmentally friendly R600a refrigerant




Model Number	Condenser	Refrigeration Unit Location (Front View)	Dimensions W x D x H	Shipping Dimensions W x D x H	Electrical	Shipping Weight	List F.O.B. Griffin
HNC-120BA-R-SLH	Air-Cooled	Right Side	47.2" x 13.6" x 11"	51.5" x 16.25" x 20.25"	115V/60/1	94 Lbs.	\$6,470
HNC-120BA-L-SLH	Air-Cooled	Left Side	47.2" x 13.6" x 11"	51.5" x 16.25" x 20.25"	115V/60/1	94 Lbs.	\$6,470
HNC-150BA-R-SLH	Air-Cooled	Right Side	59.1" x 13.6" x 11"	62.25" x 16.25" x 20.25"	115V/60/1	115 Lbs.	\$6,980
HNC-150BA-L-SLH	Air-Cooled	Left Side	59.1" x 13.6" x 11"	62.25" x 16.25" x 20.25"	115V/60/1	115 Lbs.	\$6,980
HNC-180BA-R-SLH	Air-Cooled	Right Side	70.9" x 13.6" x 11"	74" x 16.25" x 20.25"	115V/60/1	130 Lbs.	\$7,810
HNC-180BA-L-SLH	Air-Cooled	Left Side	70.9" x 13.6" x 11"	74" x 16.25" x 20.25"	115V/60/1	130 Lbs.	\$7,810
HNC-210BA-R-SLH	Air-Cooled	Right Side	82.7" x 13.6" x 11"	85.75" x 16.25" x 20.25"	115V/60/1	145 Lbs.	\$8,640
HNC-210BA-L-SLH	Air-Cooled	Left Side	82.7" x 13.6" x 11"	85.75" x 16.25" x 20.25"	115V/60/1	145 Lbs.	\$8,640


"R" - Condensing Unit is on RIGHT from front view

"L" - Condensing Unit is on LEFT from front view


Not intended for overnight storage. NSF Standard 7

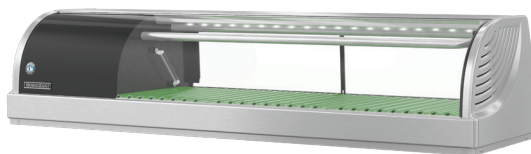


HNC-120BA-L-SLH

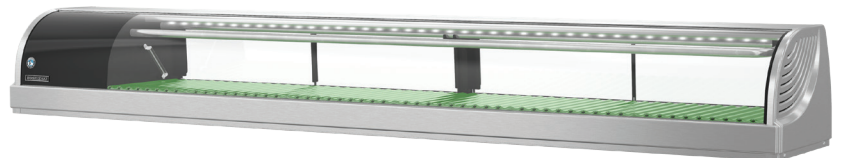

HNC-210BA-L-SLH

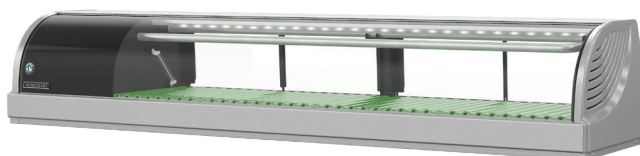

HNC-150BA-L-SLH



HNC-180BA-L-SLH



ECONOMY Refrigerators



ER1A-FS*



ER2A-FS*

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light

- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	ER1A-FS	ER2A-FS
Interior Storage Capacity (AHAM)	17.8 ft ³	38.61 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 29.63" x 81.63"	54.38" x 29.63" x 81.63"
Depth with Doors Open at 90°	55.38"	55.38"
Interior Door Opening Width	22.25"	22.9"
Interior Door Opening Height	52.1"	52.1"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.5" x 23.1"	24.3" x 21.7"
Crated Shipping Weight	279 lbs.	523 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 28.75" x 84"	58" x 31.5" x 84"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	2	4.3
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	1.06	2.1
Heat Rejection (BTU / hr)	1960(1/5HP)	4291(1/3HP)
Voltage Range	103 - 127	103 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	33° to 39°F	33° to 39°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$5,270	\$8,220



ECONOMY Freezers



EF1A-FS*



EF2A-FS

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	EF1A-FS	EF2A-FS
Interior Storage Capacity (AHAM)	17.74 ft ³	38.54 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 29.63" x 81.63"	54.38" x 29.63" x 81.63"
Depth with Doors Open at 90°	55.38"	55.38"
Interior Door Opening Width	22.25"	22.9"
Interior Door Opening Height	52.1"	52.1"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.5" x 23.1"	24.3" x 21.7"
Crated Shipping Weight	279 lbs.	523 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 28.75" x 84"	58" x 31.5" x 84"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3.2	4.7
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	4.62	8.8
Heat Rejection (BTU / hr)	1399(1/3HP)	2074(1/2HP)
Voltage Range	103 - 127	103 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	-5° to 5°F	-5° to 5°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$6,350	\$9,600





ECONOMY Undercounters

Refrigerators



EUR27A★



EUR48A★

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	EUR27A	EUR48A
Interior Storage Capacity (AHAM)	6.33 ft ³	12.09 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	47.75" x 30" x 33.75"
Depth with Doors Open at 90°	54.5"	51.5"
Interior Door Opening Width	22.6"	19.5"
Interior Door Opening Height	22.75"	22.75"
Adjustable Shelves	1	2
Shelf Dimensions (W x D)	22" x 16"	21.25" x 16"
Crated Shipping Weight	200 lbs.	290 lbs.
Crated Shipping Dimensions (L x W x H)	33" x 29" x 37"	52" x 33" x 37"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	1.5	1.8
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	0.95	1.21
Heat Rejection (BTU / hr)	1289(1/6HP)	1709(1/6HP)
Voltage Range	115-127	115-127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	-5° to °F	33° to 39°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$4,190	\$5,850



ECONOMY Undercounters



Freezers



EUF27A ★



EUF48A




- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	EUF27A	EUF48A
Interior Storage Capacity (AHAM)	6.33 ft ³	12.09 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	47.75" x 30" x 33.75"
Depth with Doors Open at 90°	55.75"	52.75"
Interior Door Opening Width	22.6"	19.5"
Interior Door Opening Height	22.75"	22.75"
Adjustable Shelves	1	2
Shelf Dimensions (W x D)	22" x 16"	21.25" x 16"
Crated Shipping Weight	200 lbs.	290 lbs.
Crated Shipping Dimensions (L x W x H)	33" x 29" x 37"	52" x 33" x 37"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	1.2	1.7
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	1.92	3.44
Heat Rejection (BTU / hr)	993(1/6HP)	1468(1/6HP)
Voltage Range	115-127	115-127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	-5° to 5°F	-5° to 5°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$4,700	\$6,310





ICE ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-0229	DS Door Reversal Part (Order as a Service Part)	AM-50BAJ, C-80BAJ	
HS-5061	Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (order as accessory)	AM-50BAJ, C-80BAJ, KM-81BAJ, KM-116BAJ	\$930
HS-0182	Side Trim Kit	AM-50BAJ, C-80BAJ	\$350
HS-2133	2" Top Spacer Kit available	AM-50BAJ, C-80BAJ	\$270
H9320-51 	Recommended Water Filtration - Single Configuration	AM-50BAJ, C-80BAJ, KM-81BAJ, KM-116BAJ, KM-161B_J, KM-231BAJ, KM-301B_J, KM-350M_J, KM-520M_J, KM-660M_J, KMD-410M_J, KMD-530M_J, KML-325M_J, KML-500M_J, KML-700M_J, IM-500SAB, IM-200BAC, IM-50BAA-LM, F-300BAJ, F-330BAJ, F-500BAJ, F-450MAJ, F-801M_J, F-1002M_J, F-1501M_J, F-2001M_J, F-330BAJ-C, F-450MAJ-C, F-801M_J-C, F-1002M_J-C, F-1501M_J-C, F-2001MRJ-C, FD-650M_J-C, FD-1002M_J-C, FS-1001MLJ-C, FS-1022MLJ-C, FS-1501MLJ-C	\$570
H9320-52 	Recommended Water Filtration - Double Configuration	KM-901M_J, KM-1100M_J, KMD-860M_J, IM-50BAA-Q, KMS-822MLJ, KMS-1122MLJ, KMS-1402MLJ	\$960
H9320-53 	Recommended Water Filtration - Triple Configuration	KM-1301S_J, KM-1340M_J, KM-1601MRJ, KM-1601S_J, KM-1900S_J, KM-2200S_J3, KM-2600S_J3, KMH-2100S_J, KMS-2000MLJ	\$1,350
HS-5426	Tamper Proof Kit - Air-Cooled Units	KM-350M_J, KM-520M_J, KM-660M_J	\$610
HS-5427	Tamper Proof Kit - Water/Remote Units	KM-520M_J, KM-660M_J	\$610
HS-5245	Tamper Proof Kit - Air-Cooled Units	KM-901M_J, KM-1100M_J	\$720
HS-5246	Tamper Proof Kit - Water/Remote Units	KM-901M_J, KM-1100M_J	\$710
HS-5252	Tamper Proof Kit - Air-Cooled Units	KM-1301S_J, KM-1601S_J	\$790
HS-5253	Tamper Proof Kit - Water/Remote Units	KM-1301S_J, KM-1601S_J	\$790
HS-5030	Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral)	KM-1340M_J, KM-1601MRJ, KM-1601S_J, KM-1900S_J, KMH-2100S_J	\$260
HS-5062	Extension bracket for Freestyle application	KMS-822MLJ	\$220
HS-5255	Tamper Proof Kit	KM-2200S_J3, KM-1900S_J	\$898
LP-6 LEG	Four 6" Stainless Steel Legs Package available (optional)	F-300BAJ, F-330BAJ, F-500BAJ, F-330BAJ-C, B-250SF, B-500SF, BD-500SF, B-700SF, B-800SF, B-900SF	\$330
HS-2120	Cutter head for finer flaked ice	F-801M_J, F-1002M_J	\$280
HS-2036	Top Kit for KM-350M, KM-520M or KM-660M	DM-200B	\$300
DM Legs	Four 4" Black Die Cast Legs Kit	DM-200B	\$260
HS-5329	Top Kit for for FS-1022MLJ-C	DM-4420N	\$250
HS-5330	Top Kit for for FD-650M_J-C & FD-1002M_J-C	DM-4420N, IM-500SAB	\$570
HS-5441	Replacement All-in-One Filter Cartridge, HS-5441 (pack of 2)	DWM-20A	\$430
HS-5442	Replacement Alkaline Chamber	DWM-20A	\$450
HS-5504	6-Month Replacement Kit: Filters (2 ea.) alkaline chamber, air filter, nozzle tip w/aerator	DWM-20A	\$880
HS-5542	DWM Top Kit for SD-271	DWM-20A	\$250
HS-5560	Large Square Anti-Microbial Cover (50 mm x 50 mm)	DWM-20A	\$70
HS-2033	Order 8" Top Kit to accommodate 22"W ice machines	B-250SF, B-900SF, B-500SF	\$330
HS-5429	Bin Door Catch	B-250SF	\$110
HS-2035	Order 22" Top Kit to accommodate 30"W ice machines	B-800SF, B-900SF, B-700SF	\$350
HS-2032	4" Top Kit to accommodate (2) 22"W ice machines	B-800SF, B-900SF	\$300
HS-2132	Top Kit: KMD application	B-900SF	\$650
HS-2129	Top Kit: KMD application	B-500SF	\$380
HS-2034	Order 14" Top Kit to accommodate 30"W ice machines	B-700SF, B-800SF	\$330
HS-2130	Top Kit: KMD application	B-700SF	\$450
HS-2066	Seismic Kit for SD 500 Stands	SD Stands	\$280
HS-2071	Leg Seismic Kit SD 500 Stands	SD Stands	\$720
HS-5588	35' Brazing Required R-404A	URC-5FZ	\$1,030
HS-2150	Quick-Connect Kit (not required if line set is ordered)	URC-5FZ	\$310
HS-5604	25' Brazing Required R-404A	URC-9FZ	\$750

HS-5505	35' Brazing Required R-404A	URC-9FZ, URC-14FZ	\$810
HS-5606	55' Brazing Required R-404A	URC-9FZ, URC-14FZ	\$1,020
HS-5299	25' Brazing Required R-404A	SRC-10J	\$610
HS-5300	35' Brazing Required R-404A	SRC-10J	\$780
HS-5301	55' Brazing Required R-404A	SRC-10J	\$980
HS-5102	Hail Guard Kit	URC-14FZ	\$370
HS-0243	25' Brazing Required R-404A	SRK-20J, SRK-20J3	\$810
HS-0244	35' Brazing Required R-404A	SRK-20J, SRK-20J3	\$1,010
HS-0245	55' Brazing Required R-404A	SRK-20J, SRK-20J3	\$1,300
HS-5600	Booster Antenna	Remote Monitoring System	\$110
HS-5607	Optional Bin Scoop Holder	All SF Bins	\$150
HS-5323	25' Brazing Required R-404A	URC-22FZ	\$980
HS-5324	35' Brazing Required R-404A	URC-22FZ	\$1,350
HS-5325	55' Brazing Required R-404A	URC-22FZ	\$1,080
HS-5095	Hail Guard Kit	URC-22FZ	\$270
HS-0250	25' Brazing Required R-404A	SRK-10J, SRK-12J, SRK-12J3, SRK-15J, SRK-15J3	\$780
HS-0251	35' Brazing Required R-404A	SRK-10J, SRK-12J, SRK-12J3, SRK-15J, SRK-15J3	\$980
HS-0252	55' Brazing Required R-404A	SRK-10J, SRK-12J, SRK-12J3, SRK-15J, SRK-15J3	\$1,260
HS-5323	25' Brazing Required R-404A	SRC-14J	\$610
HS-5324	35' Brazing Required R-404A	SRC-14J	\$780
HS-5325	55' Brazing Required R-404A	SRC-14J	\$980
HS-5587	Brazed Line Set 25 Ft for URC-5FZ	URC-5FZ	\$600
HS-5588	Brazed Line Set 35 Ft for URC-5FZ	URC-5FZ	\$760
H9320-54	Single - Medical System	Single Manifold System - Medical	\$610

DCM(-OS), DB & DKM - DISPENSERS ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
LP-4 LEG	Four 4" Stainless Steel Legs Package available (optional)	DCM-271BAH(-OS)	\$300
LP-6 LEG	Four 6" Stainless Steel Legs Package available	DCM-300BAH(-OS), DCM-500BAH(-OS), DCM-75_B_H(-OS), DB-200H	\$330
LP-6P LEG	Four 6" Painted Legs Package available	DCM-300BAH(-OS), DCM-500BAH(-OS), DCM-75_B_H(-OS)	\$310
LP-6 FLANGE LEG	Four 6" Stainless Steel Legs Package available	DB-130H, B-300SF, BD-300SF, SD Stands	\$380
SD-271	Equipment Stand	DCM-271BAH(-OS)	\$1,870
SD-500	Equipment Stand	DCM-300BAH(-OS), DCM-500BAH(-OS)	\$2,080
SD-750	Equipment Stand	DCM-75_B_H(-OS)	\$2,510
HS-2036	Top Kit for KM-350M, KM-520M or KM-660M	DB-200H	\$300
HS-2066	Seismic Wall Mount Kit	DCM-300BAH(-OS), DCM-500BAH(-OS)	\$280
HS-2067	Seismic Wall Mount Kit	DCM-75_B_H(-OS)	\$350
HS-2070	Seismic Wall Mount Kit	DCM-271 BAH(-OS)	\$270
HS-2071	Leg Seismic Kit	DCM-300BAH(-OS), DCM-500BAH(-OS)	\$720
HS-2072	Leg Seismic Kit	DCM-75_B_H(-OS)	\$660
HS-2104	Wall Mount Kit	DCM-271BAH(-OS)	\$1,180
HS-2109	Chute & grill replacement kit	DB-130H, DB-200H	\$470
HS-3586	6" Casters - Set of 4	6" Casters - Set of 4	\$660
HS-5559	Round Anti-Microbial Cover (25 mm diameter)	DCM-300BAH, DCM-500BAH, DCM-75_B_H	\$90
H9320-54	4H-SI Water Filter Hoshizaki Healthcare Filtration System - Single Configuration	DCM-271BAH, DCM-300BAH, DCM-500BAH, DCM-75_B_H	\$610
H9655-08	4H-SI Water Filter Hoshizaki Healthcare Filtration System - Cartridge (1 pk)	DCM-271BAH, DCM-300BAH, DCM-500BAH, DCM-75_B_H	\$420

REFRIGERATION ACCESSORIES

CASTERS & LEGS

Model Number	Description	For Use With	List F.O.B. Griffin
HS-3546	4" Casters - Set of four, two with brakes	1/2 Section Uprights	\$600
HS-3547	4" Casters - Set of six, three with brakes	3 Section Uprights	\$920
HS-5035	4" Casters - Set of four, two with brakes	1, 2 & 3 Section Horizontal Units	\$150
HS-5036	6" Casters - Set of four, two with brakes	1, 2 & 3 Section Horizontal Units	\$220
HS-5037	2 1/4" Casters - Set of four, two with brakes for ADA Compliant dimensions	1 & 2 Section Undercounters	\$160
HS-5320	3 3/8" Casters - Set of four, two with brakes for ADA Compliant dimensions	for pizza preps	\$160
HS-5321	3 3/8" Casters - Set of six, three with brakes for ADA Compliant dimensions	for pizza preps	\$230
HS-5662	4" Casters with Shims (6pk)	BB80, BB95, BB80-G, BB95-G, CC80, CC95, DD80, DD95	\$400
HS-5663	4" Casters with Shims (4pk)	BB59, BB69, BB59-G, BB69-G, CC50, CC65, DD59, DD69	\$250
LP-6 LEG	6" Stainless Steel Legs, set of 4	1, 2 & 3 Section Upright Models [3 section needs 2 sets] & pizza preps	\$320
LP-6P LEG	6" Painted Leg (grey), set of 4	1, 2 & 3 Section Upright Models [3 section needs 2 sets]& pizza preps	\$300

FOOT PEDALS

Model Number	Description	For Use With Steelheart® Models	List F.O.B. Griffin
HS-5378	One Door Foot Pedal (right foot pedal)	Left Hinge - upright, solid door Steelheart® models	\$430
HS-5379	One Door Foot Pedal (left foot pedal)	Right Hinge - upright, solid door Steelheart® models	\$430
HS-5380	Two Door Foot Pedal	2 & 3 Section Uprights	\$750
HS-5555	Left-Hinged Door Foot Pedal (right foot pedal)	Solid door undercounter, worktop and sandwich preps	\$420
HS-5556	Right-Hinged Door Foot Pedal (left foot pedal)	Solid door undercounter, worktop and sandwich preps	\$420

DOOR REVERSAL KIT

Model Number	Description	List F.O.B. Griffin
HS-5258	Door Reversal Kit - Undercounter Glass Door Models (Right Hinge to Left Hinge)	\$300
HS-5259	Door Reversal Kit - Undercounter Glass Door Models (Left Hinge to Right Hinge)	\$290

SHELVES

Model Number	Description	For Use With Steelheart® Models	List F.O.B. Griffin
HS-5052	Industrial Strength Epoxy Coated Shelf, Includes 4 Pilaster Clips	1,2,3 Section Uprights	\$290
HS-5053	Industrial Strength Epoxy Coated Shelf, 3 each, Includes 12 Pilaster Clips	1,2,3 Section Uprights	\$420
HS-5054	Industrial Strength Stainless Steel Shelf, Includes 4 Pilaster Clips	1,2,3 Section Uprights	\$440
HS-3504	Industrial Strength Stainless Steel Center Shelf	2 Section Uprights	\$410
HS-3505	Industrial Strength Stainless Steel Center Shelf, 3 each	2 Section Uprights	\$650
HS-3509	Industrial Strength Epoxy Coated Shelf Center Shelf	2 Section Uprights	\$320
HS-3510	Industrial Strength Epoxy Coated Shelf Center Shelf, 3 each	2 Section Uprights	\$490
HS-3550	Pass-Thru Epoxy Shelf, 3 pack	1 & 2 Section Pass-Thrus	\$410
HS-3551	Pass-Thru Epoxy Shelf, 1 pack	1 & 2 Section Pass-Thrus	\$350
HS-3552	Pass-Thru Stainless Steel Shelf, 3 Pack	1 & 2 Section Pass-Thrus	\$1,230
HS-3553	Pass-Thru Stainless Steel Shelf, 1 Pack	1 & 2 Section Pass-Thrus	\$600
HS-5388	Industrial Strength Epoxy Coated Shelf Center Shelf, 1 each	3 Section Uprights	\$320
HS-5389	Industrial Strength Epoxy Coated Shelf Center Shelf, 3 each	3 Section Uprights	\$750
HS-5057	Tempered Glass Shelves, 3 each	For use with HR24C-G	\$320
HS-5058	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 27" and 72" Undercounters, Worktops and Preps	\$130
HS-5235	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 36" Undercounters, Worktops and Preps	\$270
HS-5059	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 48" Undercounters, Worktops and Preps	\$140
HS-5108	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 60" Undercounters, Worktops and Preps	\$170
HS-5116	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 27" and 72" Undercounters, Worktops and Preps	\$350
HS-5117	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 48" Undercounters, Worktops and Preps	\$410
HS-5118	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 60" Undercounters, Worktops and Preps	\$490
HS-5151	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	PR67/93A	\$290
HS-5152	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	PR46B	\$290
HS-5153	Stainless Steel Shelf, Includes 4 Pilaster Clips	PR67/93A	\$490
HS-5154	Stainless Steel Shelf, Includes 4 Pilaster Clips	PR46B	\$510
HS-5169	Lower Stainless Steel Shelf, 4 Pilaster Clips	All 27" Undercounters, Worktops, and Preps	\$350
HS-5580	Stainless shelves - 1 pk	PR60B	\$490
HS-5581	Additional epoxy shelf - 1 pk	PR60B	\$190

SHELVES - CONTINUED

HS-5592	Standard wooden wine rack shelves	HR-15	\$110
HS-5593	Small wooden wine rack shelves	HR-24	\$130
HS-5594	Large wooden wine rack shelves	HR-24	\$150
HS-5595	Complete wine shelf set for HR-15 (set of 4 wood shelves with 4 slidina rails)	HR-15	\$1,080
HS-5596	Complete wine shelf set for HR-24 (set of 5 wood)	HR-24	\$1,160
HS-5658	Narrow Unit Shelves (Epoxy, 1 pack)	FSN models	
HS-5679	Narrow Unit Shelves (SS, 1 pack)	FSN models	
HS-5680	Narrow Unit Shelves (SS, 3 pack)	FSN models	

OVERSHELVES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5172	Single Overshelf for 27" Cabinet	27" Undercounters, Worktops, Sandwich Preps & Mega Top	\$ 980
HS-5237	Single Overshelf for 36" Cabinet	36" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,080
HS-5229 [‡]	Single Overshelf for 46" / 93" Pizza Cabinet	46" / 93" Pizza Preps - cabinets can accommodate (2) HS-5229 Single Overshelves or (2) HS-5228 Double Overshelves.	\$1,350
HS-5173	Single Overshelf for 48" Cabinet	48" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,110
HS-5174	Single Overshelf for 60" Cabinet	60" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,340
HS-5639	Single Overshelf for 60" Pizza Cabinet	60" Pizza Cabinet	\$1,110
HS-5231 [‡]	Single Overshelf for 67" Pizza Cabinet	67" Pizza Cabinet	\$1,440
HS-5175	Single Overshelf for 72" Cabinet	72" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,620
HS-5163	Double Overshelf for 27" Cabinet	27" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,300
HS-5236	Double Overshelf for 36" Cabinet	36" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,450
HS-5228 [‡]	Double Overshelf for 46" / 93" Cabinet	46" / 93" Pizza Prep Preps 93" cabinets can accommodate (2) HS-5229 Single Overshelves	\$1,820
HS-5164	Double Overshelf for 48" Cabinet	48" Undercounters, Worktops, Sandwich Preps & Mega Top	\$1,890
HS-5165 [†]	Double Overshelf for 60" Cabinet	60" Undercounters, Worktops, Sandwich Preps & Mega Top	\$2,420
HS-5640	Double Overshelf for 60" Cabinet	60" Pizza Preps	\$2,000
HS-5230 [‡]	Double Overshelf for 67" Cabinet	67" Pizza Prepss	\$2,380
HS-5166 [†]	Double Overshelf for 72" Cabinet	72" Undercounters, Worktops, Sandwich Preps & Mega Top	\$3,120

[†]Compatible with models manufactured since March 2016. (Serial # FXXXXXC and after) / [‡]Compatible with models manufactured since January 2017. (Serial # GXXXXXA and after) / * 93" cabinets can accommodate (2) HS-5229 Single Overshelves or (2) HS-5228 Double Overshelves.

TRAY / PAN SLIDES

(16) Sets on 3" Centers per section is the recommended maximum capacity for Uprights. Units can hold as many as (24) sets on 2" Centers per section.

Model Number	Description	For Use With	List F.O.B. Griffin
HS-3557	Stainless Steel Bottom Support Universal Pan Slides (1 Set), Includes 4 Pilaster Clips	Steelheart models	\$280
HS-3558	Stainless Steel Bottom Support Universal Pan Slides (4 Sets), Includes 16 Pilaster Clips	Steelheart models	\$870
HS-5081	Stainless Steel Bottom Support Universal Pan Slides (3 Sets), Includes 16 Pilaster Clips	Steelheart models	\$690
HS-5092	Stainless Steel Bottom Support Wire Tray Slides (1 Set) for 18x26 Baker Pan Only, Includes 4 Pilaster Clips	Steelheart models	\$210
HS-5093	Stainless Steel Bottom Support Wire Tray Slides (4 Sets) for 18x26 Baker Pan Only, Includes 16 Pilaster Clips	Steelheart models	\$640

PIZZ PREP TABLES - PAN SLIDES

Model Number	Description	List F.O.B. Griffin
HS-5514	Removable Tray Pan Rack For Pizza Preps- Accommodates (6) 18" x 26" Sheet Pans With 3" Spacing	\$690

FLAT LIFT OFF COVERS

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5070	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening	SR27B-12M, SR48B-12M, SR60B-12M, *SR60B-24M, *SR72B-24M, SR27B-12MD, *SR60B-24MD4 (*2 of each cover required per model)	\$420
HS-5279	Flat Lift-Off Stainless Steel Cover - 15 pan Mega Top opening	SR36B-15M	\$420
HS-5071	Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	SR48B-18M, SR60B-18M, SR72B-18M, SR48B-18MD4	\$420
HS-5072	Flat Lift-Off Stainless Steel Cover	SR27B-8, SR27B-8D	\$420
HS-5073	Flat Lift-Off Stainless Steel Cover	SR48B-8, SR60B-8	\$420
HS-5278	Flat Lift-Off Stainless Steel Cover - 10 pan Sandwich Top opening	SR36B-10	\$430
HS-5074	Flat Lift-Off Stainless Steel Cover - 12 pan Sandwich Top opening	SR48B-12, SR48B-12MD4, SR60B-12, SR72B-12	\$420
HS-5106	Flat Lift-Off Stainless Steel Cover	SR60B-16, SR72B-16	\$550
HS-5107	Flat Lift-Off Stainless Steel Cover	SR72B-18	\$560
HS-5070 + HS-5071	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	SR72B-30M, SR72B-30MD6 (1 of each cover required per model)	\$420 (Each Cover)

COMPOSITE CUTTING BOARDS

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5202	Dual Rear Cutting Board		
HS-5265	10" x 27" x 1/2" Composite Cutting Board	27" Sandwich Preps & Mega Top	\$420
HS-5266	10" x 36" x 1/2" Composite Cutting Board	36" Sandwich Preps & Mega Top	\$560
HS-5267	10" x 48" x 1/2" Composite Cutting Board	48" Sandwich Preps & Mega Top	\$760
HS-5268	10" x 60" x 1/2" Composite Cutting Board	60" Sandwich Preps & Mega Top	\$930
HS-5269	10" x 72" x 1/2" Composite Cutting Board	72" Sandwich Preps & Mega Top	\$1,120
HS-5270	19" x 46" x 1/2" Composite Cutting Board	46" Pizza Preps	\$1,370
HS-5271	19" x 67" x 1/2" Composite Cutting Board	67" Pizza Preps	\$2,050
HS-5272	19" x 93" x 1/2" Composite Cutting Board	93" Pizza Preps	\$2,860

GLASS DOOR MERCHANDISER ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5446	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-10-HC	\$230
HS-5291	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-26-HC	\$260
HS-5293	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-45-SD-HC	\$260
HS-5295	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-49-HC	\$260
HS-5290	Price Tag Holder	RM-10-HC	\$20
HS-5292	Price Tag Holder	RM-26-HC	\$20
HS-5294	Price Tag Holder	RM-45-SD-HC	\$20
HS-5296	Price Tag Holder	RM-49-HC	\$20
HS-5447	Epoxy Shelf, Includes 4 Pilaster Clips	RM-10-HC	\$150
HS-5317	Epoxy Shelf, Includes 4 Pilaster Clips	RM-26-HC	\$220
HS-5318	Epoxy Shelf, Includes 4 Pilaster Clips	RM-45-SD-HC	\$220
HS-5319	Epoxy Shelf, Includes 4 Pilaster Clips	RM-49-HC	\$220
HS-5343	Epoxy Shelf, Includes 4 Pilaster Clips	RM-7-HC	\$90
HS-5344	Epoxy Floor Shelf	RM-7-HC	\$70
HS-5288	4" Casters-Set Of Four, Two With Brakes	RM-10-HC, RM-26-HC, RM-45-SD-HC, RM-49-HC	\$160
HS-5460	Flat Epoxy coated shelf, RM-65-HC Middle Section	RM-65-HC	\$220
HS-5461	Flat Epoxy coated shelf, RM-65-HC Right & Left Section	RM-65-HC	\$220
HS-5465	Organizer Shelf with Tracks, Middle Section	RM-65-HC	\$260
HS-5466	Organizer Shelf with Tracks, Right & Left Section	RM-65-HC	\$260

BACK BAR ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5410	Complete Door Assembly-Solid, Right Hinge	All Back Bar and Direct Draw Models except DD24	\$400
HS-5411	Complete Door Assembly-Solid, Left Hinge	All Back Bar and Direct Draw Models except DD24, BB80, BB80-G, DD80	\$400
HS-5412	Complete Door Left Section Assembly-Solid, Left Hinge 80"	BB80, BB80-G, DD80	\$400
HS-5413	Complete Door Assembly-Glass, Right Hinge	All Back Bar and Direct Draw Models except DD24	\$820
HS-5414	Complete Door Assembly-Glass, Left Hinge	BB59, BB69, BB95, BB59-G, BB69-G, DD59, DD69, DD95	\$820
HS-5415	Complete Door Left Section Assembly-Glass, Left Hinge 80"	BB80, BB80-G, DD80	\$800
HS-5417	Flat Shelf, 59" & Right 80" Cabinets, 21.25" x 21.4", Includes 4 SS pilaster clips	BB59, BB59-G, DD59, (Right Section) BB80, BB80-G, DD80	\$150
HS-5418	Flat Shelf, 69" & 95" Cabinets, 26" x 21.4", Includes 4 SS pilaster clips	BB69, BB69-G, BB95, DD69, DD95, BB95-G	\$150
HS-5419	Flat Shelf Center, 80" Cabinets, 23.1" x 21.4", Includes 4 SS pilaster clips	(Center) BB80, BB80-G, DD80	\$150
HS-5420	Flat Shelf Left, 80" Cabinets, 18" x 21.4", Includes 4 SS pilaster clips	(Left Section) BB80, BB80-G, DD80	\$150
HS-5421	Set of 4 Pilasters 20.2"	All Back Bar and Direct Draw Models	\$150
HS-5515	Bottle Dividers for Back Bar Shelves, 6 Pack with 12 clips	BB59, BB69, BB80, BB95, BB59-G, BB69-G, BB80-G, BB95-G	\$200
HS-5662	4" Casters with Shims (6pk)	BB80, BB95, BB80-G, BB95-G, CC80, CC95, DD80, DD95	\$400
HS-5663	4" Casters with Shims (4pk)	BB59, BB69, BB59-G, BB69-G, CC50, CC65, DD59, DD69	\$250

ECONOMY SERIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5511	Flat Shelf Economy Series 1 Section Uprights with clips	Refrigerator, Freezer	\$350
HS-5512	Flat Shelf Economy Series 2 Section Uprights with clips	Refrigerator, Freezer	\$360

MISCELLANEOUS ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-4007	Drawer Assembly Divider Bar (Accommodates 1/2, 1/3 and 1/6 Size Pans)	Undercounters, Worktops, Prep Tables, Equipment Stands	\$160
HS-5534	12" Rail Divider Bar	Prep Tables	\$80

MISCELLANEOUS ACCESSORIES - CONTINUED

HS-5069	Sandwich Top Rail Adapter Bar - 12.6" x 1.0" (front to back)	Sandwich Preps & Mega Top Prep Tables	\$40
HS-5280	Full Size Pan Adapter Bar for UR27B-8 Rail	Sandwich Preps	\$70
HS-5281	Full Size Pan Adapter Bar for SR36B-10 Rail	Sandwich Preps	\$70
HS-5476	Black kickplate for HR15A, HR15A-G	HR15A, HR15A-G	\$40
HS-5112	Stacking Kit - UR27B & UF27B	Undercounters	\$640
HS-5184	All Mega Top divider front to back	Mega Top Prep Tables	\$70
HS-5185	All Mega Top & Sandwich Prep 27-8 divider side to side (outer)	Sandwich Preps & Mega Top Prep Tables	\$50
HS-5186	Mega Top 18M & 30M divider side to side (center)	Mega Top Prep Tables	\$50
HS-5187	Sandwich Prep 27-8 divider front to back	Sandwich Preps Preps	\$50
HS-5188	Sandwich Prep 48-8 and 12, 16, 18 pan openings divider front to back	Sandwich Preps Preps	\$40
HS-5189	Sandwich Prep 48-8 and 12, 16, 18 pan openings side to side (outer)	Sandwich Preps Preps	\$50
HS-5190	Sandwich Prep 12 & 16 pan openings side to side (center)	Sandwich Preps Preps	\$50
HS-5191	Sandwich Prep 18 pan openings side to side (outer)	Sandwich Preps Preps	\$70
HS-5192	Sandwich Prep 18 pan openings side to side (center)	Sandwich Preps Preps	\$60
HS-5453	Heated Condensate Pan Kit	≥46" Undercounter, Worktop and Preps	\$620
HS-5462	Heated Condensate Pan	Steelheart® Uprights	\$660
HS-5525	Stainless Steel Rear Panel for 2 Section Upright, (factory installed only)	Steelheart® Uprights	\$2,390
HS-5526	Stainless Steel Rear Panel for 1 Section Upright, (factory installed only)	Steelheart® Uprights	\$1,240
HS-5496	Stainless Steel Rear Panel for DT1A (factory installed only)	Steelheart® Uprights	\$1,240
HS-5497	Stainless Steel Rear Panel for DT2A (factory installed only)	Steelheart® Uprights	\$2,390
HS-5449	14" cutting board brackets	SR48, 60 A-Series	
HS-5530	Stacking Kit (Need 2 for stacked 3 high)	IM-500	
HS-5585	14" cutting boards Brackets	SR48B & SR60B Models	\$170
HS-5601	Dual Rear Cutting board	SR60B-18M	\$600
HS-5626	Stainless Steel Panel Overlay Kit	48" B Series Refrigerator and Freezers, Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED	\$380
HS-5620	Stainless Steel Panel Overlay Kit	27" B Series Refrigerator Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED	\$260
HS-5621	Stainless Steel Panel Overlay Kit	UR27B-GLP01 Refrigerator Undercounter - FACTORY INSTALLED	\$215
HS-5622	Stainless Steel Panel Overlay Kit	27" B Series Freezer Undercounter and Worktop Models - FACTORY INSTALLED	\$320
HS-5624	Stainless Steel Panel Overlay Kit	UF27B-GLP01 Freezer Undercounter - FACTORY INSTALLED	\$345
HS-5625	Stainless Steel Panel Overlay Kit	36" B Series Undercounter and Worktop Refrigerator Models - FACTORY INSTALLED	\$400
HS-5627	Stainless Steel Panel Overlay Kit	UR48B-GLP01 Refrigerator Undercounter - FACTORY INSTALLED	\$440
HS-5628	Stainless Steel Panel Overlay Kit	72" B Series Refrigerator Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED	\$530
HS-5630	Stainless Steel Panel Overlay Kit	60" B Series Refrigerator and Freezer Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED	\$460
HS-5611	Stainless Steel Panel Overlay Kit	60" B Series Undercounter, Worktop, Sandwich Preps, Mega Top Prep Models - FACTORY INSTALLED	\$410
HS-5651	Rail Dividers for 1/6 size pans	PR46B	
HS-5652	Rail Dividers for 1/6 size pans	PR60B	
HS-5653	Rail Dividers for 1/6 size pans	PR67B	
HS-5654	Rail Dividers for 1/6 size pans	PR93B	
HS-5692	Drawer Dividers	PR60B	
HS-5693	Drawer Dividers	PR46B, PR67B, PR93B	
HS-5518	Narrow Dividers for Rubbermaid Pans	SR27B-8, SR27B-D2, SR48B-8, SR60B-8 models	\$45
HS-5519	Narrow Dividers for Rubbermaid Pans	SR27B-12M, SR27B-12MD2, SR48B-12, SR48B-12M, SR48B-12D2, SR48B-12D4, SR60B-12, SR60B-12M, SR72B-12, SR72B-12M models	\$80
HS-5521	Narrow Dividers for Rubbermaid Pans	SR60B-16, SR72B-16 models	\$157
HS-5522	Narrow Dividers for Rubermaid Pans	SR72B-18, SR60B-18M, SR72B-18M, SR48B-18MD4	\$125
HS-5655	Epoxy-Coated Wine Shelf	Steelheart® Single Section (1 pk)	\$450
HS-5656	Stainless Steel Wine Shelf	Steelheart® Single Section (1 pk)	\$750